


HSF

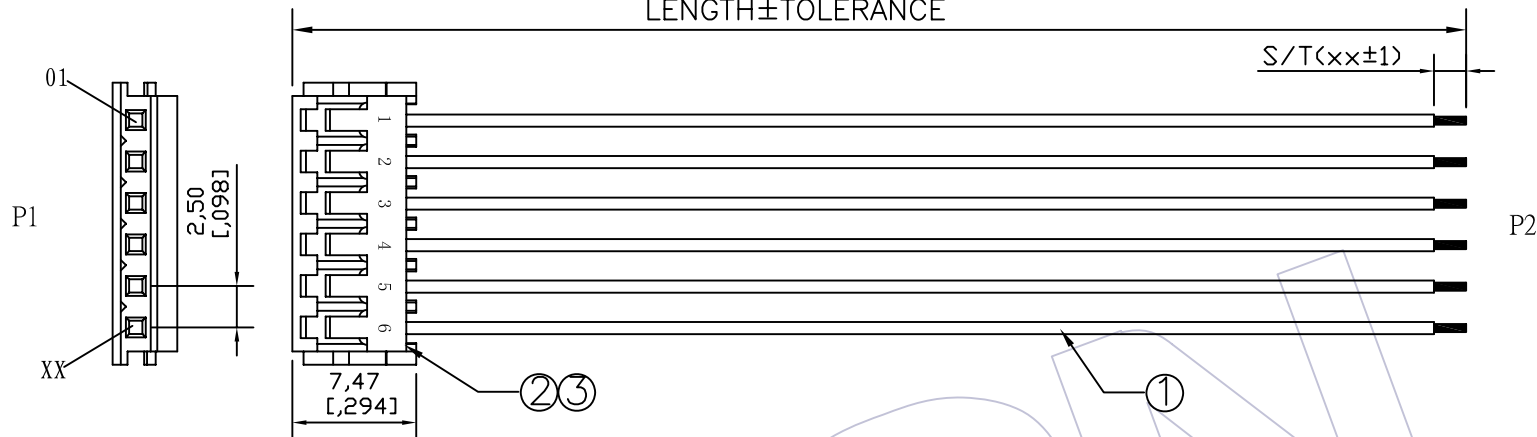

SPECIFICATIONS

Insulation Resistance: 5M Ω Min
Contact Resistance: 3.0 Ω Max
Withstand Voltage: DC 300V, 10S
The Cable Assembly Must 100% Test

Ordering Information

C9130 - xx 01 xxx 301

No. of Pins:
02~15P

Shape Style:
01=one end Process,
another one end plate tin

Length of Line

CONNECT METHOD		
	Color	
P1		P2
01	XXX	OPEN
02	XXX	OPEN
03	XXX	OPEN
XX	XXX	OPEN

Wire SPEC	LENGTH	TOLERANCE
ULxxxx 22~28AWG	1~499	±5
	500~999	±10
	1000~1500	±15
	1501~3000	±20
	3001~5000	±30
	5001~	± Lx1%

③	WF2504-TPSN01	Terminal	EH 2.50mm Phosphor Bronze Tin Terminal	xx	PCS
②	WF2504-HxxW01	Housing	EH 2.50mm xxP White Housing	1	PCS
①	Wxxxx-1xxx00001	WIRE	UL: xxxx, AWG: 22~28, Color: xx, Wire	xxxx	MM
NO.	PART NO.	NAME	Specification	Q' TY	UNIT

						工程图 ENGINEERING		绘图 DRAW		BEN		09/09/24		SCALE		FREE		WCON 维峰五金电子有限公司 WAFE HARDWARE ELECTRONICS CO. LTD			
						X.X	±0.30	设计 DESIGN						UNIT	mm						
						X.XX	±0.20	审 核 CHECK						SIZE	A4		料号 PART NO.		C9130-xx01xxx301		
A0	09/09/24	NEW				X.XXX	±0.10								SHEET	1/1		品名 TITLE:		PH2.50 **P Housing TO OPEN	
版次 REV	日期 DATE	变 更 说 明 MODIFICATION DESCRIPTION			变更 CHANGE	核准 APPROVE	Angle DIM	± 2' TOL	核 准 APPROVE					PROJ.		客户料号Customer NO.					