



SPECIFICATIONS

Current Rating: 9.5 AMP
Voltage Rating: 300V
Contact Resistance: 20 mΩ max
Withstand Voltage: AC1600V
Insulation Resistance: 1000MΩ Min
Screw Torque: 4.4 lbf.in
Operation Temperature: -40°C to +120°C


Housing Material: PA66, G.F, UL94V-O, BK
Screw: Steel
Pin Block: Copper Alloy
Cite Feet: PA66, G.F, UL94V-O, BK




PM350SW-2SXXXXX1N



PM350SW-2SXXXXX2(N)



PM350SW-2RXXXXX1N



PM350SW-2RXXXXX2(N)

P M 350 SW - 2 S XX A SM N 1 W

Board-Mounting
S: S/T DIP
R: R/A DIP



Positions
4, 6, 8, 10, 12, 14, 16,
18, 20, 22, 24, 26, 28,
30, 32, 34, 36, 38, 40,
42, 44, 46

Color
B=Black
U=Blue
G=Green
R=Red

Contact plating area
SM=Matte Tin



N=W/O Screw
W=W/ Screw

PM350SW-2SXXXXX1N





Pos	A	B
4	3.50	8.40
6	7.00	11.90
8	10.50	15.40
10	14.00	18.90
12	17.50	22.40
14	21.00	25.90
16	24.50	29.40
18	28.00	32.90
20	31.50	36.40
22	35.00	39.90
24	38.50	43.40
26	42.00	46.90
28	45.50	50.40
30	49.00	53.90
32	52.50	57.40
34	56.00	60.90
36	59.50	64.40
38	63.00	67.90
40	66.50	71.40
42	70.00	74.90
44	73.50	78.40
46	77.00	81.90

PM350SW-2SXXXXX2(N)

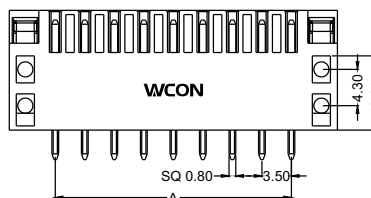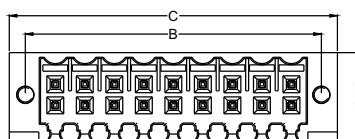



Pos	A	B	C
4	3.50	10.60	14.40
6	7.00	14.10	17.90
8	10.50	17.60	21.40
10	14.00	21.20	24.90
12	17.50	24.60	28.40
14	21.00	28.10	31.90
16	24.50	31.60	35.40
18	28.00	35.10	38.90
20	31.50	38.60	42.40
22	35.00	42.10	45.90
24	38.50	45.60	49.40
26	42.00	49.10	52.90
28	45.50	52.60	56.40
30	49.00	56.10	59.90
32	52.50	59.60	63.40
34	56.00	63.10	66.90
36	59.50	66.60	70.40
38	63.00	70.10	73.90
40	66.50	73.60	77.40
42	70.00	77.10	80.90
44	73.50	80.60	84.40
46	77.00	84.10	87.90

PM350SW-2RXXXXX1N



Pos	A	B
4	3.50	8.40
6	7.00	11.90
8	10.50	15.40
10	14.00	18.90
12	17.50	22.40
14	21.00	25.90
16	24.50	29.40
18	28.00	32.90
20	31.50	36.40
22	35.00	39.90
24	38.50	43.40
26	42.00	46.90
28	45.50	50.40
30	49.00	53.90
32	52.50	57.40
34	56.00	60.90
36	59.50	64.40
38	63.00	67.90
40	66.50	71.40
42	70.00	74.90
44	73.50	78.40
46	77.00	81.90

PM350SW-2RXXXXX2(N)

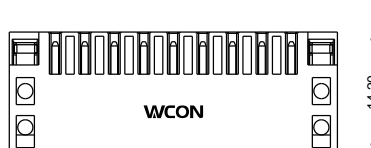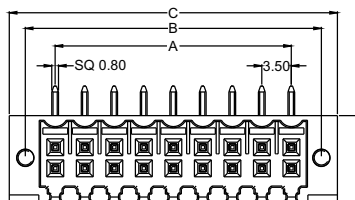


Pos	A	B	C
4	3.50	10.60	14.40
6	7.00	14.10	17.90
8	10.50	17.60	21.40
10	14.00	21.20	24.90
12	17.50	24.60	28.40
14	21.00	28.10	31.90
16	24.50	31.60	35.40
18	28.00	35.10	38.90
20	31.50	38.60	42.40
22	35.00	42.10	45.90
24	38.50	45.60	49.40
26	42.00	49.10	52.90
28	45.50	52.60	56.40
30	49.00	56.10	59.90
32	52.50	59.60	63.40
34	56.00	63.10	66.90
36	59.50	66.60	70.40
38	63.00	70.10	73.90
40	66.50	73.60	77.40
42	70.00	77.10	80.90
44	73.50	80.60	84.40
46	77.00	84.10	87.90




SPECIFICATIONS

Current Rating:9.5 AMP
Voltage Rating:300V
Contact Resistance:20 mΩ max
Withstand Voltage:AC1600V
Insulation Resistance:1000MΩ Min
Screw Torque: 4.4 lbf.in
Wire range: 16-28AWG
Operation Temperature:-40°C to +120°C


Housing Material:PA66,G.F,UL94V-O,BK
Screw:Steel
Pin Block:Copper Alloy
Cite Feet:PA66,G.F,UL94V-O,BK




PF350SW-2FXXXXXW1(N)



PF350SW-2FXXXXXN1(N)



PF350SW-2FXXXXXP1(N)



PF350SW-2FXXXXXP2(N)

P F 350 SW - 2F XX A SM N 1 W


Positions
4,6,8,10,12,14,16,
18,20,22,24,26,28,
30,32,34,36,38,40,
42,44,46

Color
B=Black
U=Blue
G=Green
R=Red

Contact plating area
SM=Matte Tin


N=W/O Screw
W=W/ Screw

PF350SW-2FXXXXXW1(N)

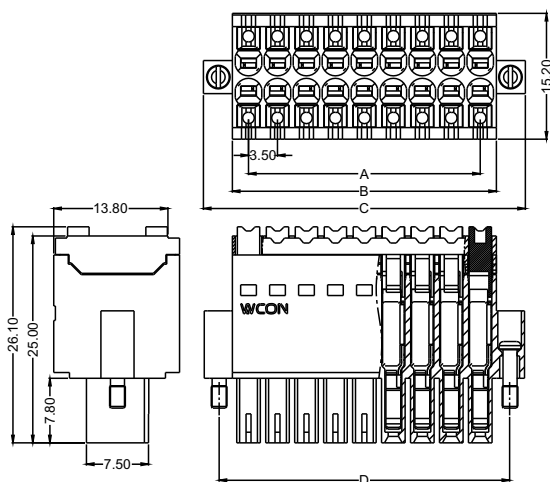

Pos	A	B	C	D
4	3.50	7.40	14.40	10.60
6	7.00	10.90	17.90	14.10
8	10.50	14.40	21.40	17.60
10	14.00	17.90	24.90	21.20
12	17.50	21.40	28.40	24.60
14	21.00	24.90	31.90	28.10
16	24.50	28.40	35.40	31.60
18	28.00	31.90	38.90	35.10
20	31.50	35.40	42.40	38.60
22	35.00	38.90	45.90	42.10
24	38.50	42.40	49.40	45.60
26	42.00	45.90	52.90	49.10
28	45.50	49.40	56.40	52.60
30	49.00	52.90	59.90	56.10
32	52.50	56.40	63.40	59.60
34	56.00	59.90	66.90	63.10
36	59.50	63.40	70.40	66.60
38	63.00	66.90	73.90	70.10
40	66.50	70.40	77.40	73.60
42	70.00	73.90	80.90	77.10
44	73.50	77.40	84.40	80.60
46	77.00	80.90	87.90	84.10



PF350SW-2FXXXXXN1(N)

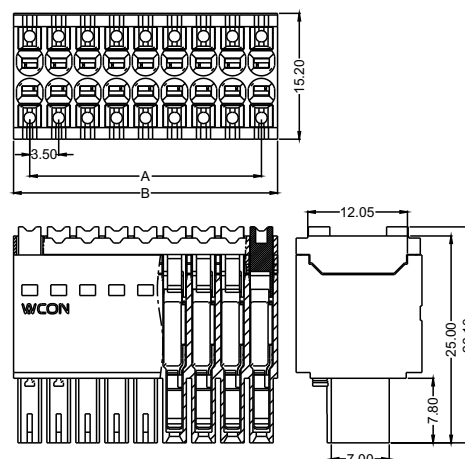

Pos	A	B
4	3.50	7.40
6	7.00	10.90
8	10.50	14.40
10	14.00	17.90
12	17.50	21.40
14	21.00	24.90
16	24.50	28.40
18	28.00	31.90
20	31.50	35.40
22	35.00	38.90
24	38.50	42.40
26	42.00	45.90
28	45.50	49.40
30	49.00	52.90
32	52.50	56.40
34	56.00	59.90
36	59.50	63.40
38	63.00	66.90
40	66.50	70.40
42	70.00	73.90
44	73.50	77.40
46	77.00	80.90

PF350SW-2FXXXXXP1(N)

PF350SW-2FXXXXXP2(N)

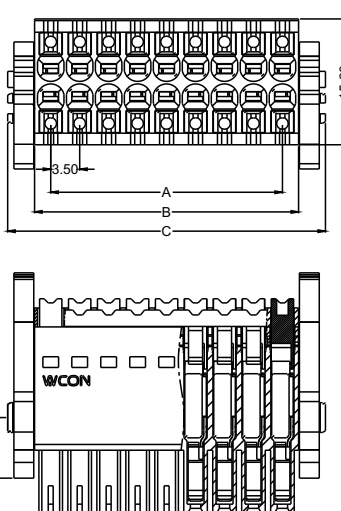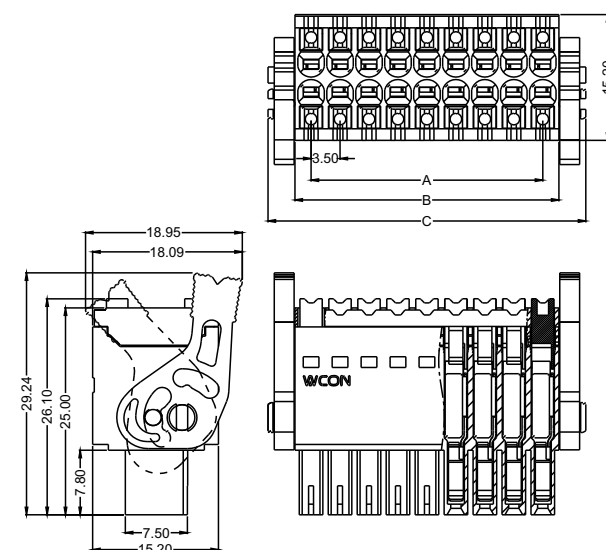

PF350SW-2FXXXXXPX(N)

Pos	A	B	C
4	3.50	7.40	13.90
6	7.00	10.90	17.40
8	10.50	14.40	20.90
10	14.00	17.90	24.40
12	17.50	21.40	27.90
14	21.00	24.90	31.40
16	24.50	28.40	34.90
18	28.00	31.90	38.40
20	31.50	35.40	41.90
22	35.00	38.90	45.40
24	38.50	42.40	48.90
26	42.00	45.90	52.40
28	45.50	49.40	55.90
30	49.00	52.90	59.40
32	52.50	56.40	62.90
34	56.00	59.90	66.40
36	59.50	63.40	69.90
38	63.00	66.90	73.40
40	66.50	70.40	76.90
42	70.00	73.90	80.40
44	73.50	77.40	83.90
46	77.00	80.90	87.40



SPECIFICATIONS

Current Rating: See Table 1

Voltage Rating: See Table 1

Contact Resistance: 20mΩMax

Withstand Voltage: 2500V

Insulation Resistance: 1000MΩMin


Screw Torque: 2 lbf.in

Wire Range: AWG#26, #24, #22, #20, #18, #16

Operation Temperature: -40°C to +105°C

Housing Material: LCP, UL94V-0

Contact: Phosphor Bronze



PM350S-2RXXBSM5

P M 350 S - 2 R XX B SM 5

Positions
4, 6, 8, 10, 12, 14, 16, 18,
20, 22, 24, 28, 30, 32, 36,
38, 40, 42, 44, 46, 48







Color
B=Black

Contact plating area
SM=Matte Tin

Table 1

UL Standard			
Application category	B	C	D
Rated Voltage(V)	300	50	/
Rated Current(A)	8	8	/
IEC Standard:			
Application category	III	III	II
Rated Voltage(V)	200	250	320
Rated Current(A)	9.5	9.5	9.5

Pos	A	B	C
4	14.40	3.50	10.50
10	24.90	14.00	21.00
12	28.40	17.50	24.50
14	31.90	21.00	28.00
16	35.40	24.50	31.50
18	38.90	28.00	35.00
20	42.40	31.50	38.50
22	45.90	35.00	42.00
24	49.40	38.50	45.50
28	56.40	45.50	52.50
30	59.90	49.00	56.00
32	63.40	52.50	59.50
36	70.40	59.50	66.50
40	77.40	66.50	73.50
46	87.90	77.00	84.00
48	91.40	80.50	87.50

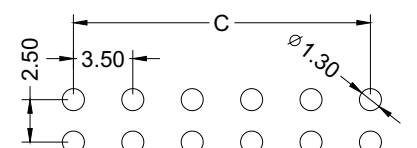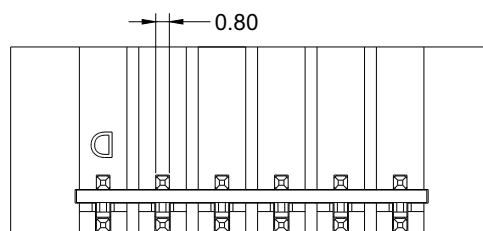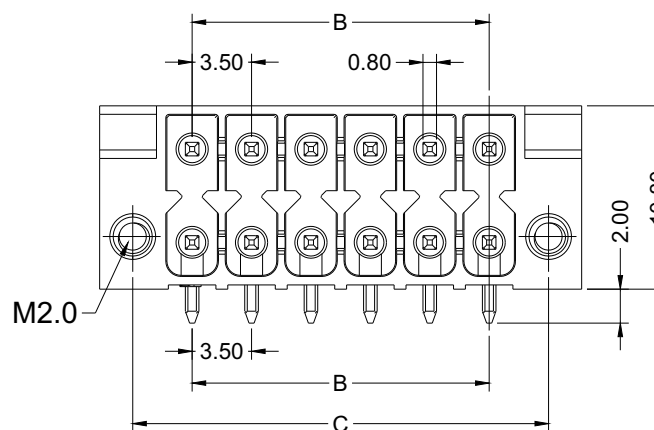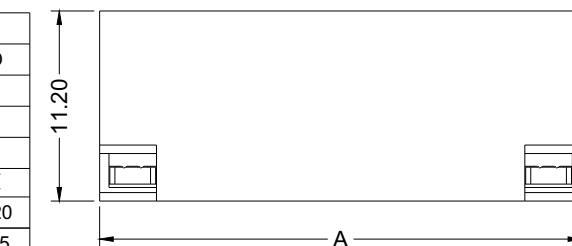

Recommended P.C.B Layout



SPECIFICATIONS

Current Rating:See Table1

Voltage Rating:See Table1

Contact Resistance:20mΩMax

Withstand Voltage:2500V

Insulation Resistance:1000MΩMin


Screw Torque: 2 lbf.in

Wire Range: AWG#26,#24,#22,#20,#18,#16

Operation Temperature:-40°C to +105°C

Housing Material:LCP,UL94V-0

Contact:Phosphor Bronze




PF350S-2FXXBXXP1





P	F	350	S -	2	F	XX	B	SN	P	1
						Positions 4,6,8,10,12,14,16,18, 20,22,24,28,30,32,36, 38,40,42,44,46,48	Color B=Black	Contact plating area SN=Tin	Options P=W/ Handle	

Table 1

UL Standard			
Application category	B	C	D
Rated Voltage(V)	300	50	/
Rated Current(A)	8	8	/
IEC Standard:			
Application category	III	III	II
Rated Voltage(V)	200	250	320
Rated Current(A)	9.5	9.5	9.5

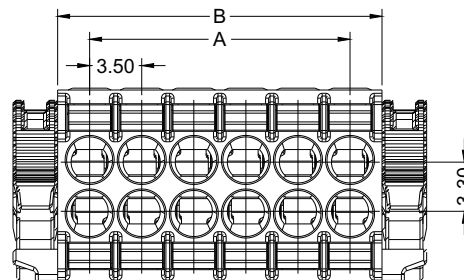


Pos	A	B	C
4	3.50	7.80	13.80
6	7.00	11.30	17.30
8	10.50	14.80	20.80
10	14.00	18.30	24.30
12	17.50	21.80	27.80
14	21.00	25.30	31.30
16	24.50	28.80	34.80
18	28.00	32.30	38.30
20	31.50	35.80	41.80
22	35.00	39.30	45.30
24	38.50	42.80	48.80
26	42.00	46.30	52.30
28	45.50	49.80	55.80
30	49.00	53.30	59.30
32	52.50	56.80	62.80
34	56.00	60.30	66.30
36	59.50	63.80	69.80
38	63.00	67.30	73.30
40	66.50	70.80	76.80
42	70.00	74.30	80.30
44	73.50	77.80	83.80
46	77.00	81.30	87.30
48	80.50	84.80	90.80

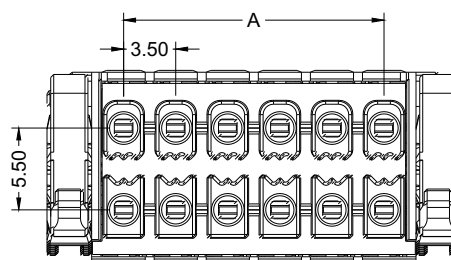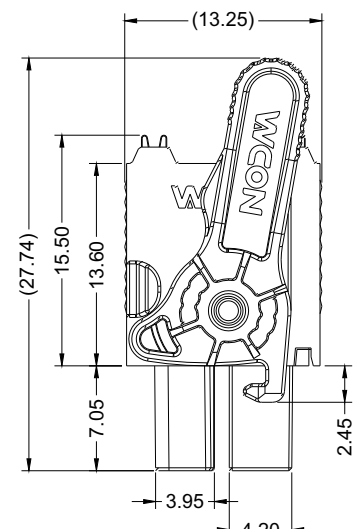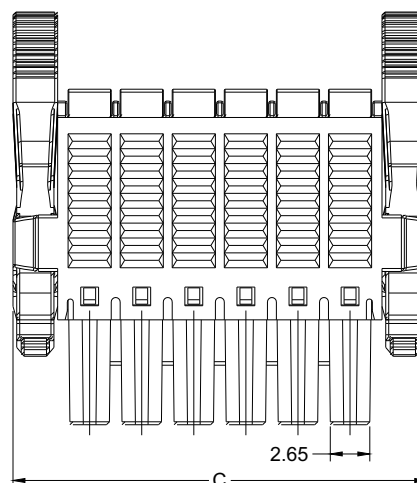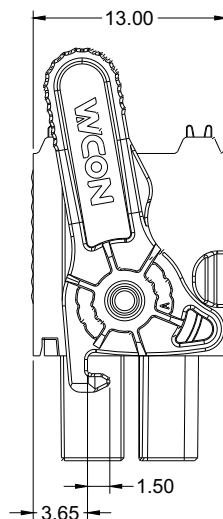




SPECIFICATIONS

Current Rating:8A
Voltage Rating:300V
Contact Resistance:8mΩMax
Withstand Voltage:AC2000V
Insulation Resistance:1000MΩMin
Screw Torque: 2 lbf.in
Wire range: 16-30AWG
Operation Temperature:-40°C to +105°C
Housing Material:PA66 UL94V-O
Cover Material:PA66 UL94-V0
Screw:Steel
Pin Block:Brass
Contact:Phosphor Bronze
Side Screw:Steel




PF350S-1FXXASMN1




PF350S-1FXXASMW1

P	F	350	S	-	1	F	<u>XX</u>	<u>A</u>	<u>SM</u>	<u>N</u>	1
							Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	


PF350S-1FXXASMN1

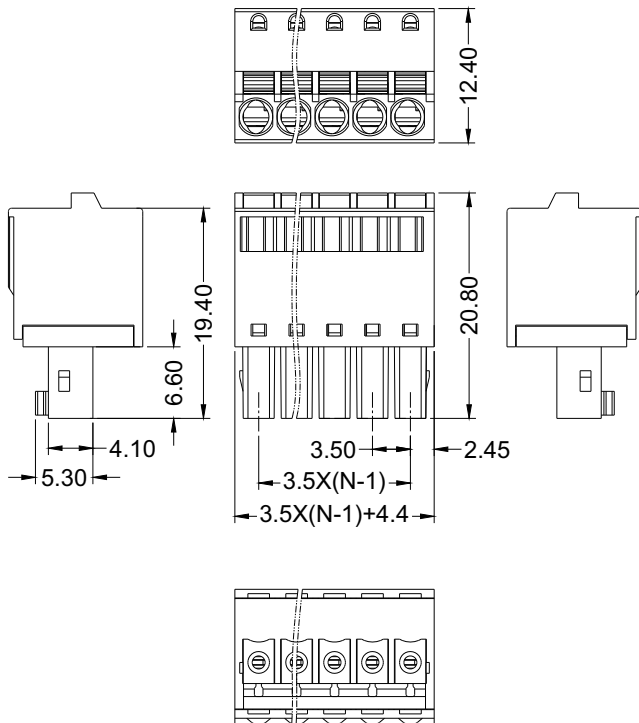

PF350S-1FXXASMW1

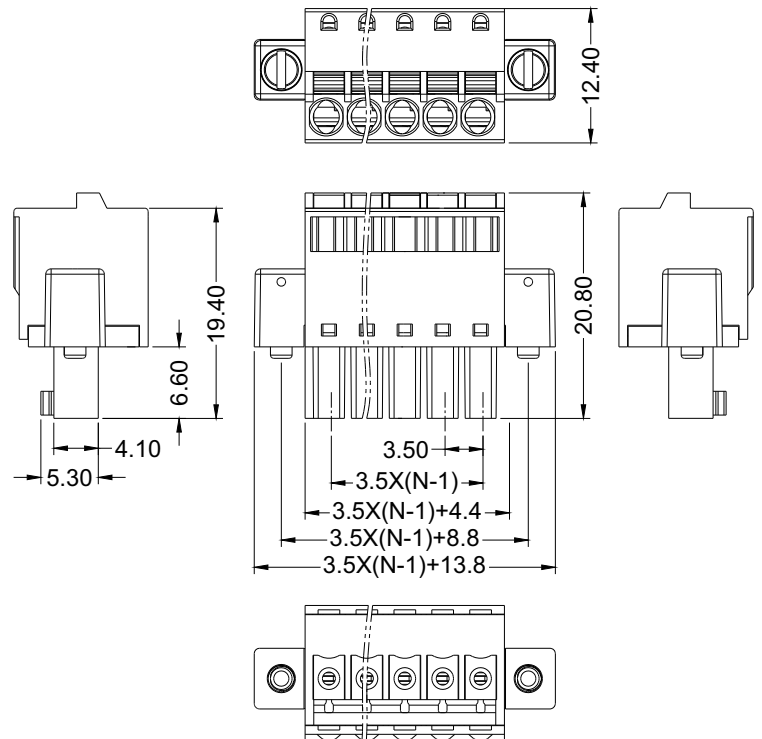

Board-Mounting
 S/T DIP:Vertical T/H
 R/A DIP:Horizontal T/H

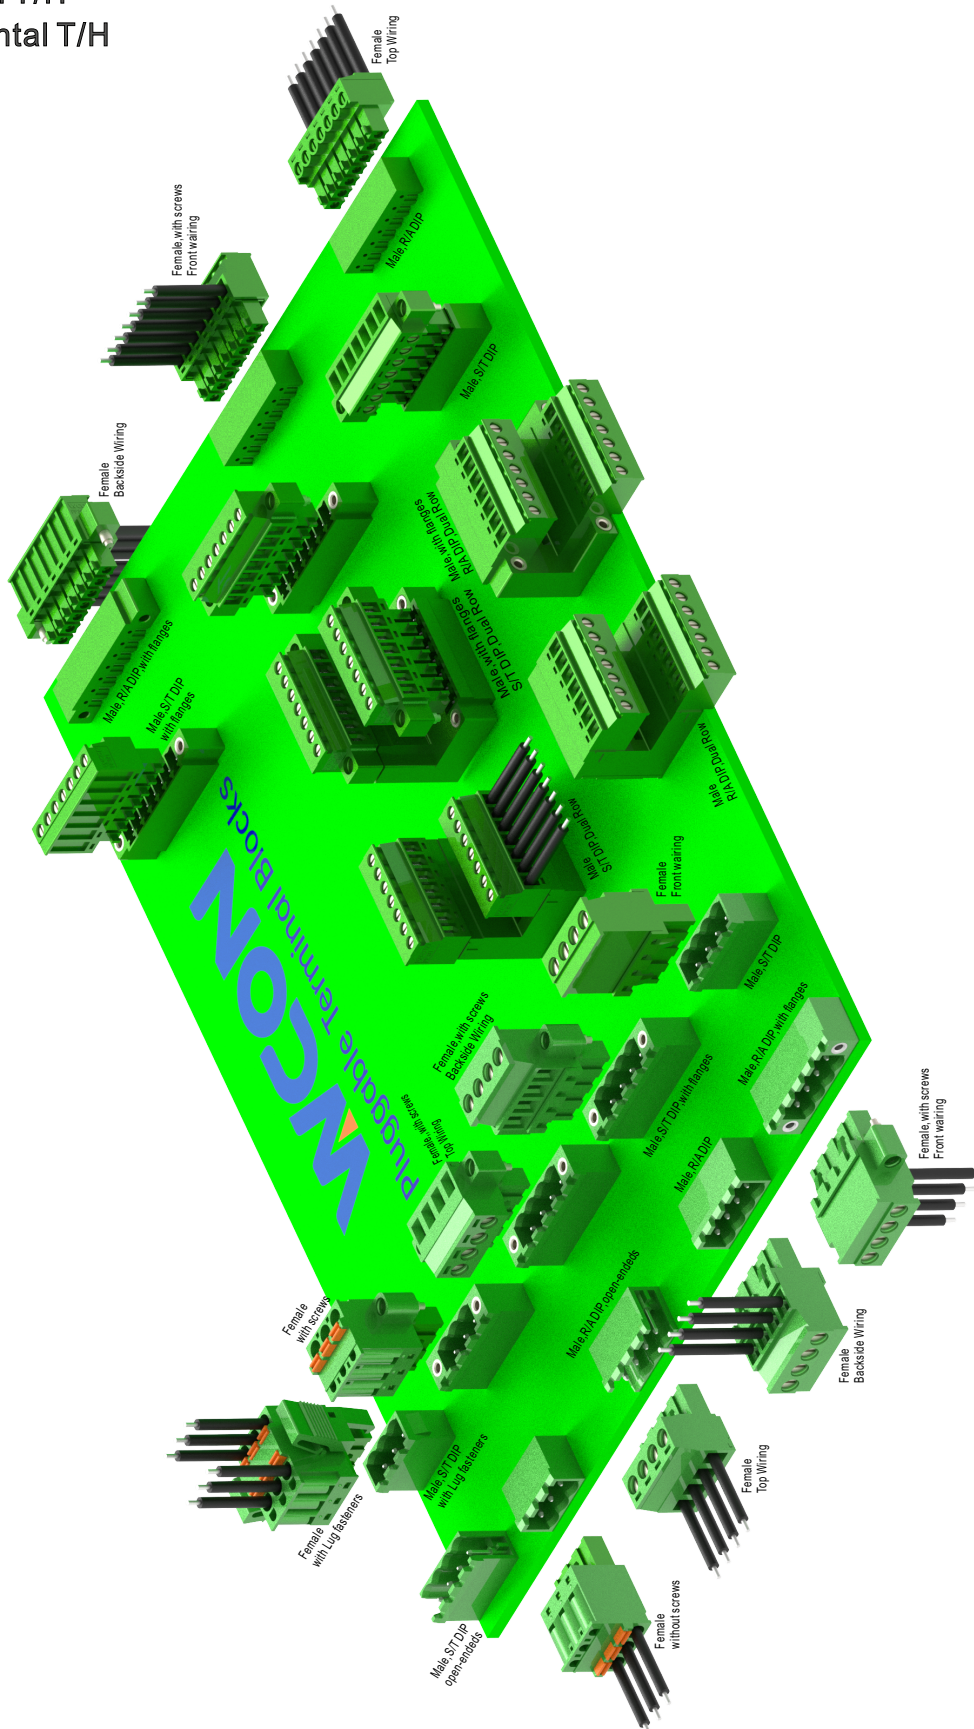



SPECIFICATIONS

Current Rating:8A

Voltage Rating:300V

Contact Resistance:8mΩ Max

Withstand Voltage:AC2000V

Insulation Resistance:1000MΩ Min


Operation Temperature:-40°C to +105°C

Housing Material:PA66+30%GF(UL94V-0)


Cover:PA66+30%GF(UL94V-0)

Terminal:Brass


Matte: Tin Plated Over Nickel



PM350-1SXXASM1



PM350-1SXXASM2




PM350-1RXXASM1



PM350-1RXXASM2


P	M	350	-	1	S	XX	A	SM	1
					Board-Mounting S:S/T DIP R:R/A DIP	Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20	Color A:Green	Contact plating area SM=Matte Tin	Options 1=W/O Flange 2=W/ Flange

PM350-1SXXASM1






11	39.90	35.00			
10	36.40	31.50	20	71.40	66.50
9	32.90	28.00	19	67.90	63.00
8	29.40	24.50	18	64.40	59.50
7	25.90	21.00	17	60.90	56.00
6	22.40	17.50	16	57.40	52.50
5	18.90	14.00	15	53.90	49.00
4	15.40	10.50	14	50.40	45.50
3	11.90	7.00	13	46.90	42.00
2	8.40	3.50	12	43.40	38.50
Pos	A	B	Pos	A	B


PM350-1SXXASM2

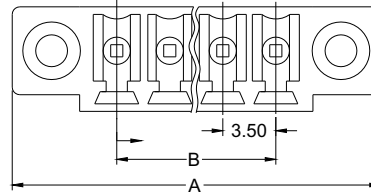

11	48.80	35.00			
10	45.30	31.50	20	80.30	66.50
9	41.80	28.00	19	76.80	63.00
8	38.30	24.50	18	73.30	59.50
7	34.80	21.00	17	69.80	56.00
6	31.30	17.50	16	66.30	52.50
5	27.80	14.00	15	62.80	49.00
4	24.30	10.50	14	59.30	45.50
3	20.80	7.00	13	55.80	42.00
2	17.30	3.50	12	52.30	38.50
Pos	A	B	Pos	A	B

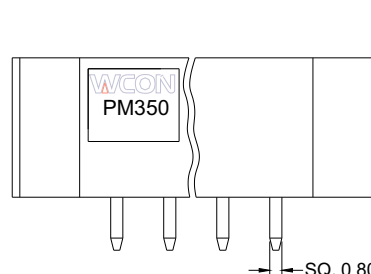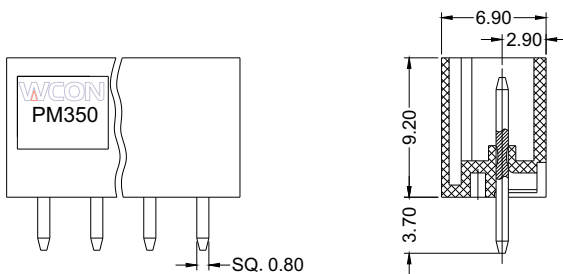


PM350-1RXXASM1





11	39.90	35.00			
10	36.40	31.50	20	71.40	66.50
9	32.90	28.00	19	67.90	63.00
8	29.40	24.50	18	64.40	59.50
7	25.90	21.00	17	60.90	56.00
6	22.40	17.50	16	57.40	52.50
5	18.90	14.00	15	53.90	49.00
4	15.40	10.50	14	50.40	45.50
3	11.90	7.00	13	46.90	42.00
2	8.40	3.50	12	43.40	38.50
Pos	A	B	Pos	A	B


PM350-1RXXASM2

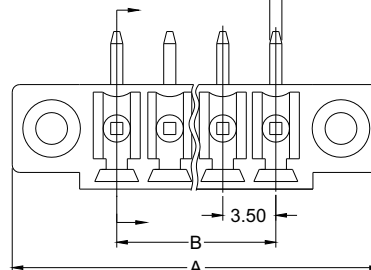


11	48.80	35.00			
10	45.30	31.50	20	80.30	66.50
9	41.80	28.00	19	76.80	63.00
8	38.30	24.50	18	73.30	59.50
7	34.80	21.00	17	69.80	56.00
6	31.30	17.50	16	66.30	52.50
5	27.80	14.00	15	62.80	49.00
4	24.30	10.50	14	59.30	45.50
3	20.80	7.00	13	55.80	42.00
2	17.30	3.50	12	52.30	38.50
Pos	A	B	Pos	A	B

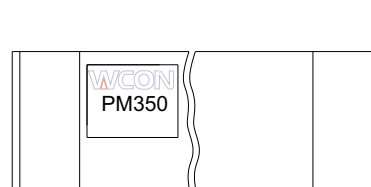


Housing Material:PA66+30%GF(UL94V-0)
Cover:PA66+30%GF(UL94V-0)
Terminal:Brass
Matte: Tin Plated Over Nickel



PM350-2SXXASM2N



PM350-2SXXASM1



PM350-2RXXASM2N



PM350-2RXXASM1

P	M	350	-	2	<u>S</u>	<u>XX</u>	<u>A</u>	<u>SM</u>	<u>1</u>	N
					Board-Mounting S:S/T DIP R:R/A DIP	Positions 4,6,8,10,12,14, 16,18,20,22,24, 26,28,30,32,34, 36,38,40	Color A:Green	Contact plating area SM=Matte Tin	Options 1=W/O Flange 2=W/ Flange	

Figure 1: PCB layout of the 16-channel 100MHz 16-bit ADC. The figure includes three views: a top view of the component, a side view, and a detailed PCB layout. The top view shows a rectangular component with 16 channels, each with a 10-bit DAC and a 16-bit ADC. The side view shows the component's profile with dimensions 21.80, 22.70, 3.50, 12.70, and 1.25. The PCB layout shows the component footprint with dimensions 7.10, 3.81, 3.81X(N/2-1), 4.40, 1.25, 12.70, 3.50, and 1.40. The layout also shows the component's internal structure with dimensions 2.40, 3.81, SQ.0.80, and 4.40.

Figure 1: PCB layout of the 100-pin connector. The figure includes three views: a top view, a side view, and a front view. The top view shows a rectangular connector with 100 pins arranged in two rows of 50. The side view shows the connector's profile with a height of 21.80. The front view shows the pin arrangement with dimensions: 22.70 (width), 21.80 (height), 7.10 (pin pitch), 3.81 (pin pitch), 3.81X(N/2-1) (total width), 2.80 (pin diameter), 15.30 (pin diameter), and 1.40 (pin diameter).



SPECIFICATIONS

Current Rating:8A

Voltage Rating:300V

Contact Resistance:8mΩ Max

Withstand Voltage:AC2000V

Insulation Resistance:1000MΩ Min

Operation Temperature:-40°C to +105°C

Housing Material:PA66+30%GF(UL94V-0)

Cover:PA66+30%GF(UL94V-0)

Terminal:Brass


Matte: Tin Plated Over Nickel



PM350-3SXXASM2N



PM350-3SXXASM1




PM350-3RXXASM2N




PM350-3RXXASM1


P	M	350 - 3	S	XX	A	SM	1 N
			Board-Mounting S:S/T DIP R:R/A DIP	Positions 4,6,8,10,12,14, 16,18,20,22,24, 26,28,30,32,34, 36,38,40	Color A:Green	Contact plating area SM=Matte Tin	Options 1=W/O Flange 2=W/ Flange

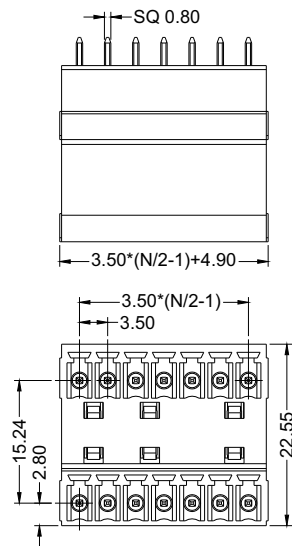


PM350-3SXXASM1

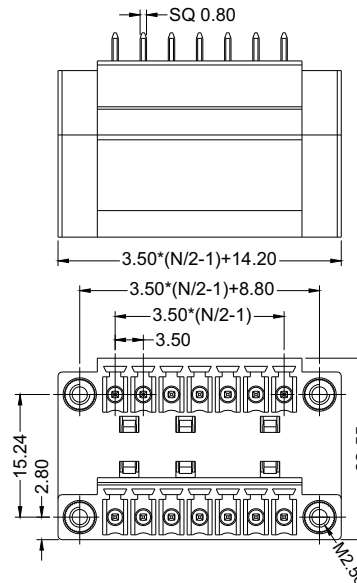

PM350-3SXXASM2N

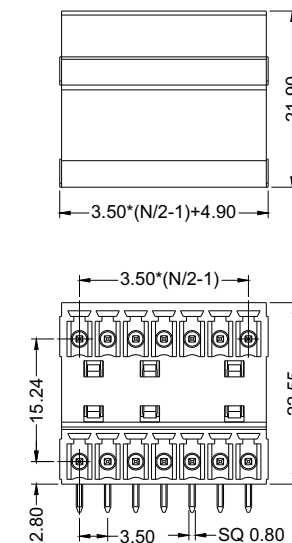

PM350-3RXXASM1

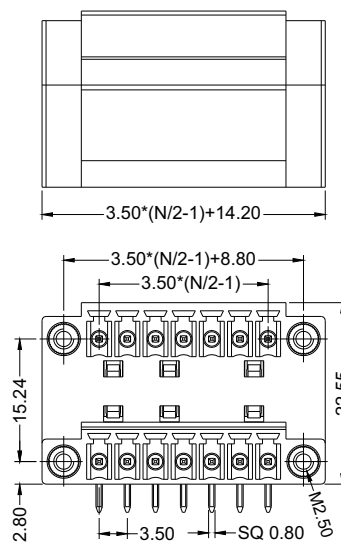

PM350-3RXXASM2N

SPECIFICATIONS

Current Rating: 8A
 Voltage Rating: 300V
 Contact Resistance: 8mΩMax
 Withstand Voltage: AC2000V
 Insulation Resistance: 1000MΩMin
 Screw Torque: 2 lbf.in
 Wire range: 16-30AWG
 Operation Temperature: -40°C to +105°C

Housing Material: PA66 UL94V-O
 Cover Material: PA66 UL94-V0
 Screw: Steel
 Pin Block: Brass
 Contact: Phosphor Bronze






PF350-AXXASMN1






PF350-AXXASMW1

P	F	350	-	A	XX	A	SM	N	1
					Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	

PF350-AXXASMN1

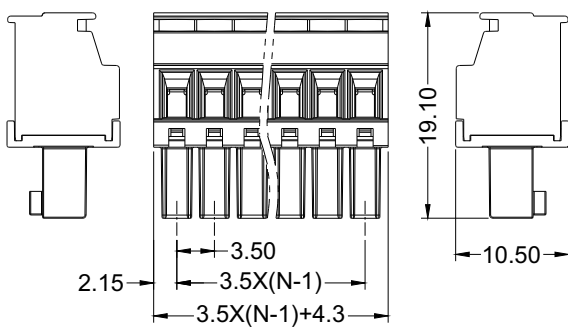

PF350-AXXASMW1

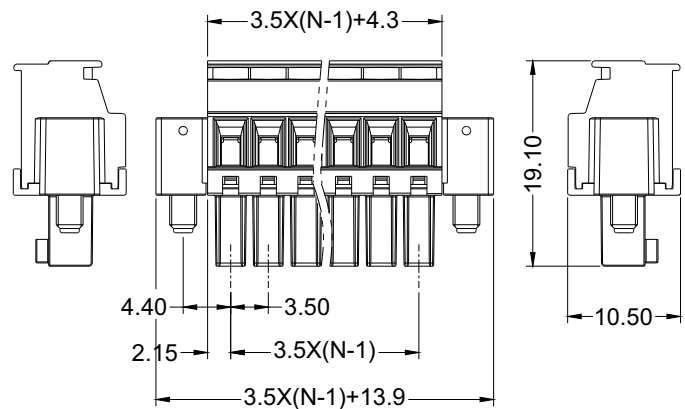

SPECIFICATIONS

Current Rating: 8A
 Voltage Rating: 300V
 Contact Resistance: 8mΩMax
 Withstand Voltage: AC2000V
 Insulation Resistance: 1000MΩMin
 Screw Torque: 2 lbf.in
 Wire range: 16-30AWG
 Operation Temperature: -40°C to +105°C

Housing Material: PA66 UL94V-0
 Cover Material: PA66 UL94-V0
 Screw: Steel
 Pin Block: Brass
 Contact: Phosphor Bronze




PF350-BXXASMN1








PF350-BXXASMW1

P	F	350	-	B	XX	A	SM	N	1
					Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	

PF350-BXXASMN1



PF350-BXXASMW1

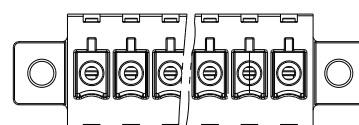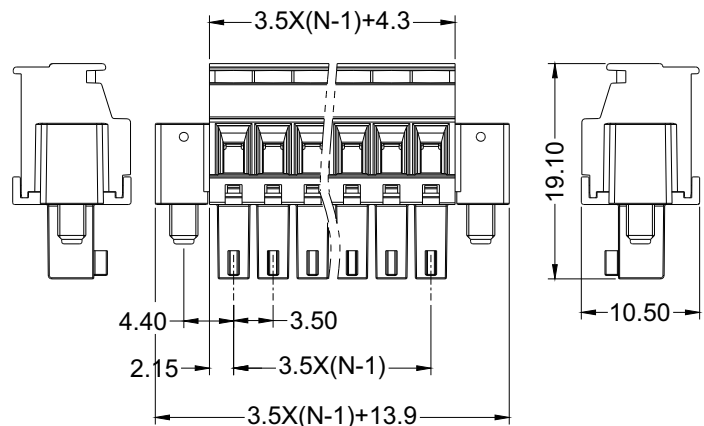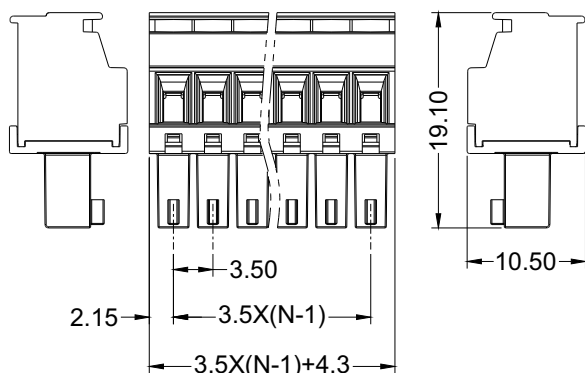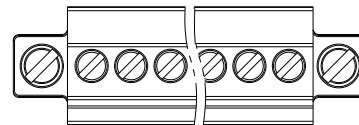



SPECIFICATIONS

Current Rating:8A
Voltage Rating:300V
Contact Resistance:8mΩMax
Withstand Voltage:AC2000V
Insulation Resistance:1000MΩMin
Screw Torque: 2 lbf.in
Wire range: 16-30AWG
Operation Temperature:-40°C to +105°C

Housing Material:PA66 UL94V-O
Cover Material:PA66 UL94-V0
Screw:Steel
Pin Block:Brass
Contact:Phosphor Bronze





PF350-CXXASMN1





PF350-CXXASMW1

P	F	350	-	C	XX	A	SM	N	1
					Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	

PF350-CXXASMW1

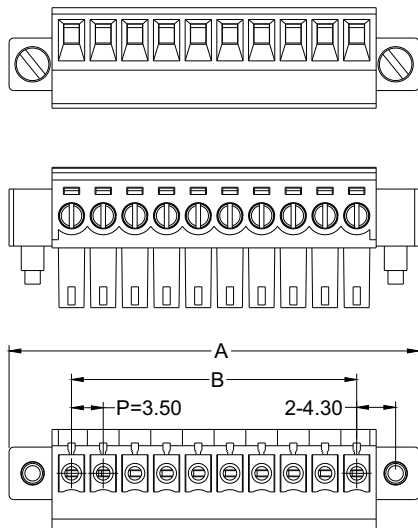

PF350-CXXASMN1

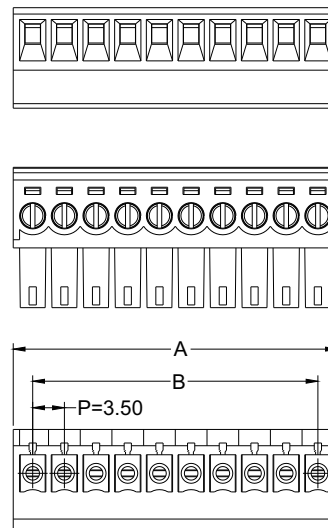

11	48.80	35.00			
10	45.30	31.50	20	80.30	66.50
9	41.80	28.00	19	76.80	63.00
8	38.30	24.50	18	73.30	59.50
7	34.80	21.00	17	69.80	56.00
6	31.30	17.50	16	66.30	52.50
5	27.80	14.00	15	62.80	49.00
4	24.30	10.50	14	59.30	45.50
3	20.80	7.00	13	55.80	42.00
2	17.30	3.50	12	52.30	38.50
Pos	A	B	Pos	A	B

11	39.30	35.00			
10	35.80	31.50	20	70.80	66.50
9	32.30	28.00	19	67.30	63.00
8	28.80	24.50	18	63.80	59.50
7	25.30	21.00	17	60.30	56.00
6	21.80	17.50	16	56.80	52.50
5	18.30	14.00	15	53.30	49.00
4	14.80	10.50	14	49.80	45.50
3	11.30	7.00	13	46.30	42.00
2	7.80	3.50	12	42.80	38.50
Pos	A	B	Pos	A	B



SPECIFICATIONS

Current Rating:8A

Voltage Rating:300V

Contact Resistance:8mΩMax

Withstand Voltage:AC2000V


Insulation Resistance:1000MΩMin

Wire range: 16-30AWG


Operation Temperature:-40°C to +105°C

Housing Material:PA66+30%GF(UL94V-0)


Contact Material:Brass



PM381-1SXXASM1



PM381-1SXXASM2




PM381-1RXXASM1




PM381-1RXXASM2

P	M	381	-	1	S	XX	A	SM	1
					Board-Mounting S:S/T DIP R:R/A DIP	Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20	Color A:Green	Contact plating area SM=Matte Tin	Options 1=W/O Flange 2=W/ Flange


PM381-1SXXASM1




11	43.30	38.10			
10	39.49	34.29	20	77.59	72.39
9	35.68	30.48	19	73.78	68.58
8	31.87	26.67	18	69.97	64.77
7	28.06	22.86	17	66.16	60.96
6	24.25	19.05	16	62.35	57.15
5	20.44	15.24	15	58.54	53.34
4	16.63	11.43	14	54.73	49.53
3	12.82	7.62	13	50.92	45.72
2	9.01	3.81	12	47.11	41.91
Pos	A	B	Pos	A	B




PM381-1SXXASM2

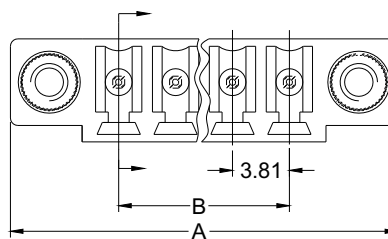


11	51.90	38.10			
10	48.09	34.29	20	86.19	72.39
9	44.28	30.48	19	82.38	68.58
8	40.47	26.67	18	78.57	64.77
7	36.66	22.86	17	74.76	60.96
6	32.85	19.05	16	70.95	57.15
5	29.04	15.24	15	67.14	53.34
4	25.23	11.43	14	63.33	49.53
3	21.42	7.62	13	59.52	45.72
2	17.61	3.81	12	55.71	41.91
Pos	A	B	Pos	A	B

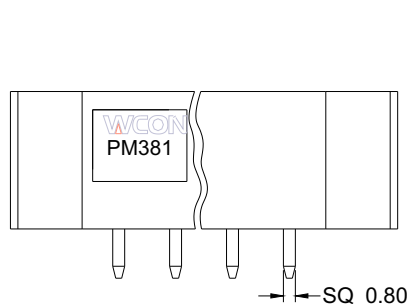


PM381-1RXXASM1




11	43.30	38.10			
10	39.49	34.29	20	77.59	72.39
9	35.68	30.48	19	73.78	68.58
8	31.87	26.67	18	69.97	64.77
7	28.06	22.86	17	66.16	60.96
6	24.25	19.05	16	62.35	57.15
5	20.44	15.24	15	58.54	53.34
4	16.63	11.43	14	54.73	49.53
3	12.82	7.62	13	50.92	45.72
2	9.01	3.81	12	47.11	41.91
Pos	A	B	Pos	A	B

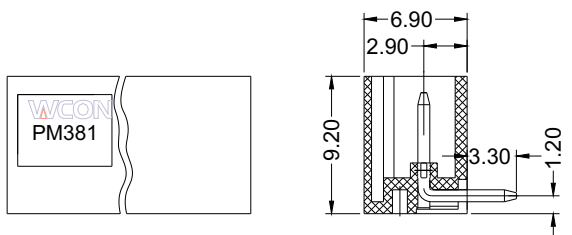

PM381-1RXXASM2

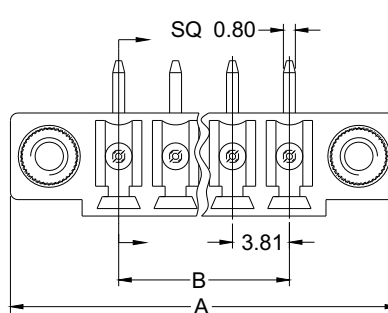

11	51.90	38.10			
10	48.09	34.29	20	86.19	72.39
9	44.28	30.48	19	82.38	68.58
8	40.47	26.67	18	78.57	64.77
7	36.66	22.86	17	74.76	60.96
6	32.85	19.05	16	70.95	57.15
5	29.04	15.24	15	67.14	53.34
4	25.23	11.43	14	63.33	49.53
3	21.42	7.62	13	59.52	45.72
2	17.61	3.81	12	55.71	41.91
Pos	A	B	Pos	A	B

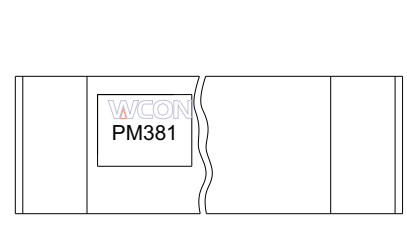





SPECIFICATIONS

Current Rating: 8A
Voltage Rating: 300V
Contact Resistance: 8mΩMax
Withstand Voltage: AC2000V
Insulation Resistance: 1000MΩMin
Wire range: 16-30AWG
Operation Temperature: -40°C to +105°C


Housing Material: PA66+30%GF(UL94V-0)
Contact Material: Brass




PM381-2SXXASM2



PM381-2SXXASM1




PM381-2RXXASM2




PM381-2RXXASM1

P	M	381	-	2	S	XX	A	SM	1
					Board-Mounting S: S/T DIP R: R/A DIP	Positions 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40	Color A: Green	Contact plating area SM=Matte Tin	Options 1=W/O Flange 2=W/ Flange


PM381-2RXXASM1

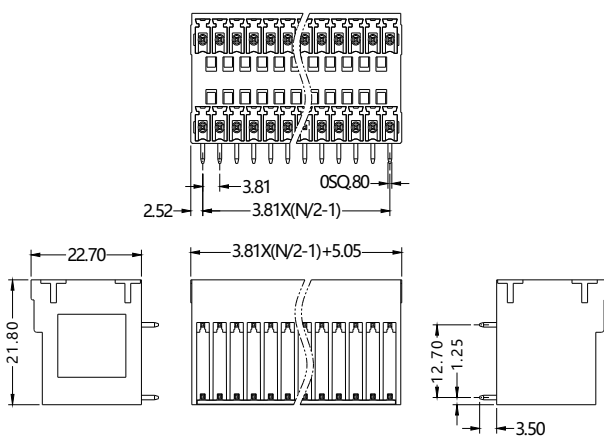


PM381-2SXXASM1

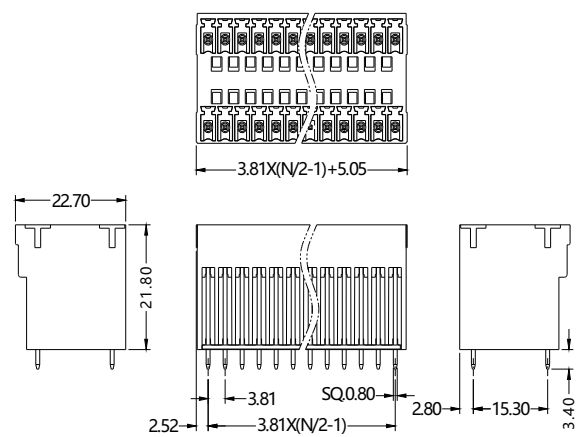

PM381-2RXXASM2

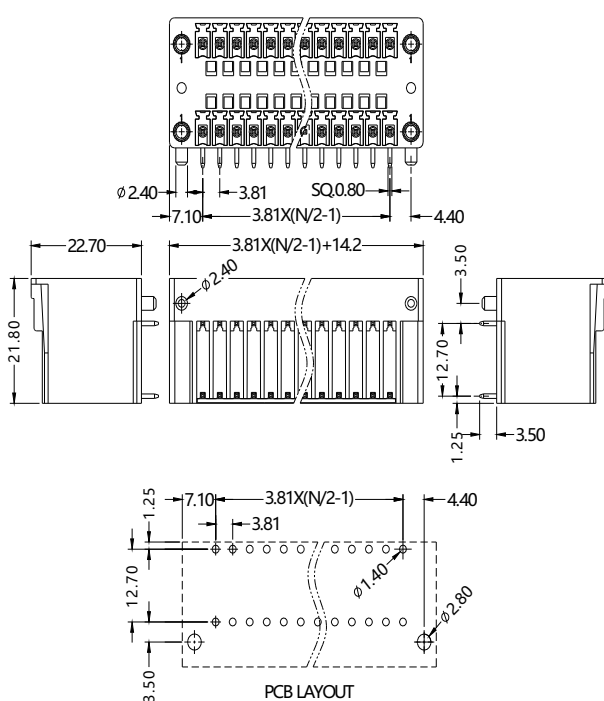

PM381-2SXXASM2

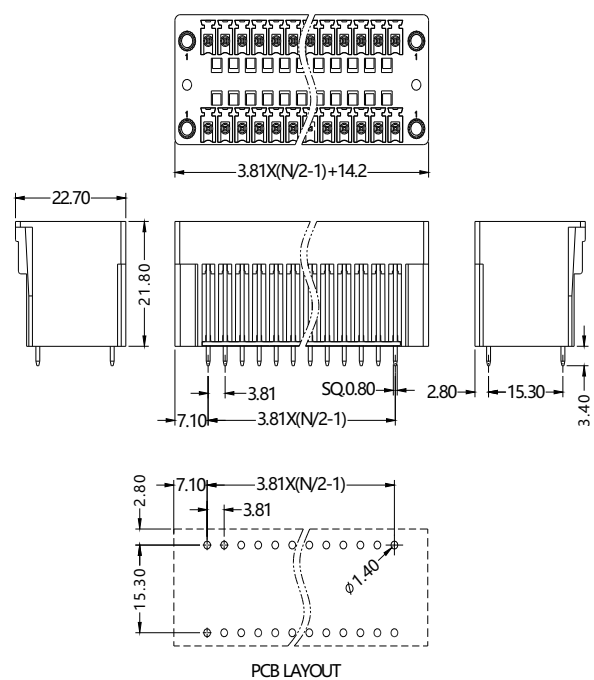



SPECIFICATIONS

Current Rating: 8A
Voltage Rating: 300V
Contact Resistance: 8mΩ Max
Withstand Voltage: AC2000V
Insulation Resistance: 1000MΩ Min
Wire range: 16-30AWG
Operation Temperature: -40°C to +105°C

Housing Material: PA66+30%GF(UL94V-0)
Contact Material: Brass




PM381-3SXXASM1



PM381-3SXXASM2




PM381-3RXXASM1




PM381-3RXXASM2






P	M	381	-	3	S	XX	A	SM	1
					Board-Mounting S: S/T DIP R: R/A DIP	Positions 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40	Color A: Green	Contact plating area SM=Matte Tin	Options 1=W/O Flange 2=W/ Flange




PM381-3SXXASM1







PM381-3SXXASM2

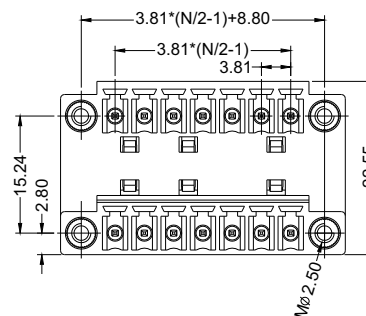

PM381-3RXXASM1



PM381-3RXXASM2

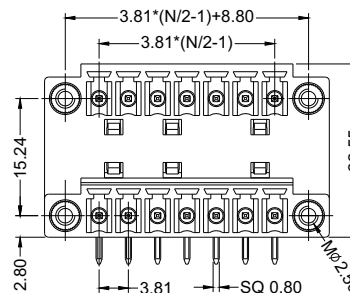

SPECIFICATIONS

Current Rating: 8A
 Voltage Rating: 300V
 Contact Resistance: 8milliohm Max
 Withstand Voltage: AC2000V
 Insulation Resistance: 1000Megohm Min
 Screw Torque: 2 lbf.in
 Wire range: 16-30AWG
 Operation Temperature: -40°C to +105°C

Housing Material: PA66 UL94V-0
 Cover Material: PA66 UL94-V0
 Screw: Steel
 Pin Block: Brass
 Contact: Phosphor Bronze






PF381-AXXASMN1






PF381-AXXASMW1

P	F	381	-	A	<u>XX</u>	<u>A</u>	<u>SM</u>	<u>N</u>	1
					Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	

PF381-AXXASMW1

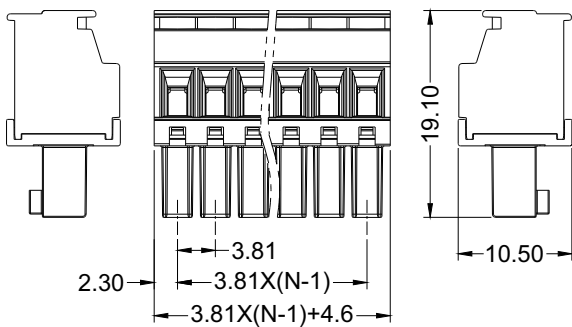

PF381-AXXASMN1

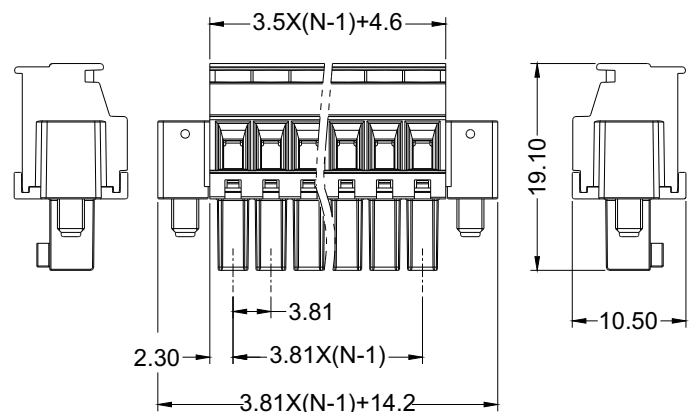

SPECIFICATIONS

Current Rating: 8A
 Voltage Rating: 300V
 Contact Resistance: 8milliohm Max
 Withstand Voltage: AC2000V
 Insulation Resistance: 1000Megohm Min
 Screw Torque: 2 lbf.in
 Wire range: 16-30AWG
 Operation Temperature: -40°C to +105°C

Housing Material: PA66 UL94V-O
 Cover Material: PA66 UL94-V0
 Screw: Steel
 Pin Block: Brass
 Contact: Phosphor Bronze






PF381-BXXASMN1






PF381-BXXASMW1

P	F	381	-	B	<u>XX</u>	<u>A</u>	<u>SM</u>	<u>N</u>	1
					Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	

PF381-BXXASMW1

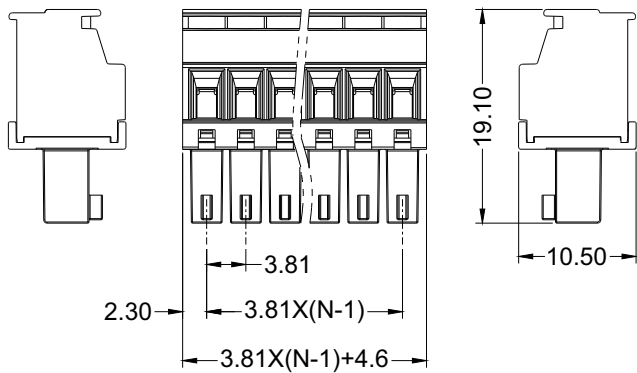

PF381-BXXASMN1

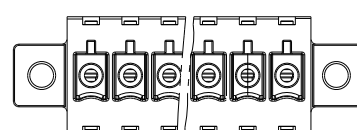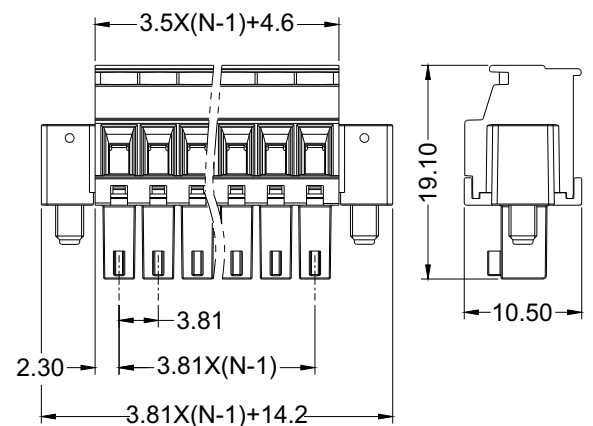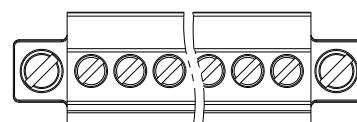

SPECIFICATIONS

Current Rating:8A
 Voltage Rating:300V
 Contact Resistance:8milliohm Max
 Withstand Voltage:AC2000V
 Insulation Resistance:1000Megohm Min
 Screw Torque: 2 lbf.in
 Wire range: 16-30AWG
 Operation Temperature:-40°C to +105°C

Housing Material:PA66 UL94V-O
 Cover Material:PA66 UL94-V0
 Screw:Steel
 Pin Block:Brass
 Contact:Phosphor Bronze





PF381-CXXASMN1





PF381-CXXASMW1

P	F	381	-	C	XX	A	SM	N	1
					Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	

PF381-CXXASMW1

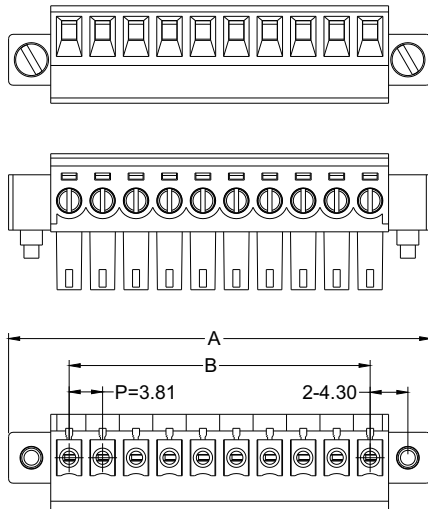

PF381-CXXASMN1

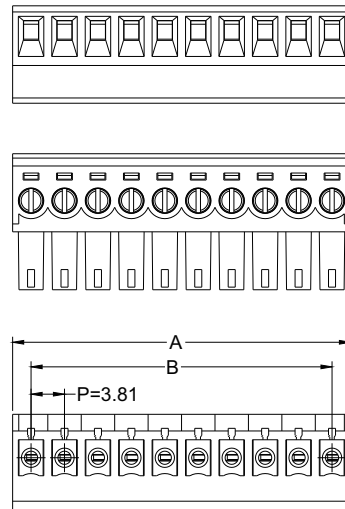


11	51.90	38.10			
10	48.09	34.29	20	86.19	72.39
9	44.28	30.48	19	82.38	68.58
8	40.47	26.67	18	78.57	64.77
7	36.66	22.86	17	74.76	60.96
6	32.85	19.05	16	70.95	57.15
5	29.04	15.24	15	67.14	53.34
4	25.23	11.43	14	63.33	49.53
3	21.42	7.62	13	59.52	45.72
2	17.61	3.81	12	55.71	41.91
Pos	A	B	Pos	A	B

11	42.30	38.10			
10	38.49	34.29	20	76.59	72.39
9	34.68	30.48	19	72.78	68.58
8	30.87	26.67	18	68.97	64.77
7	27.06	22.86	17	65.16	60.96
6	23.25	19.05	16	61.35	57.15
5	19.44	15.24	15	57.54	53.34
4	15.63	11.43	14	53.73	49.53
3	11.82	7.62	13	49.92	45.72
2	8.01	3.81	12	46.11	41.91
Pos	A	B	Pos	A	B


SPECIFICATIONS

Current Rating:8A
 Voltage Rating:300V
 Contact Resistance:8mΩMax
 Withstand Voltage:AC2000V
 Insulation Resistance:1000MΩMin
 Screw Torque: 2 lbf.in
 Wire range: 16-30AWG
 Operation Temperature:-40°C to +105°C

Housing Material:PA66 UL94V-O
 Cover Material:PA66 UL94-V0
 Screw:Steel
 Pin Block:Brass
 Contact:Phosphor Bronze





PF381S-1FXXASMN1





PF381S-1FXXASMW1

P	F	381	S-	1	F	<u>XX</u>	<u>A</u>	<u>SM</u>	<u>N</u>	1
						Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	

PF381S-1FXXASMN1

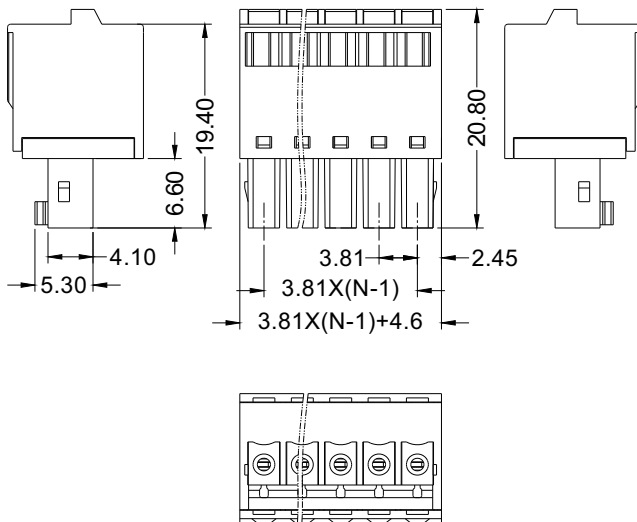

PF381S-1FXXASMW1

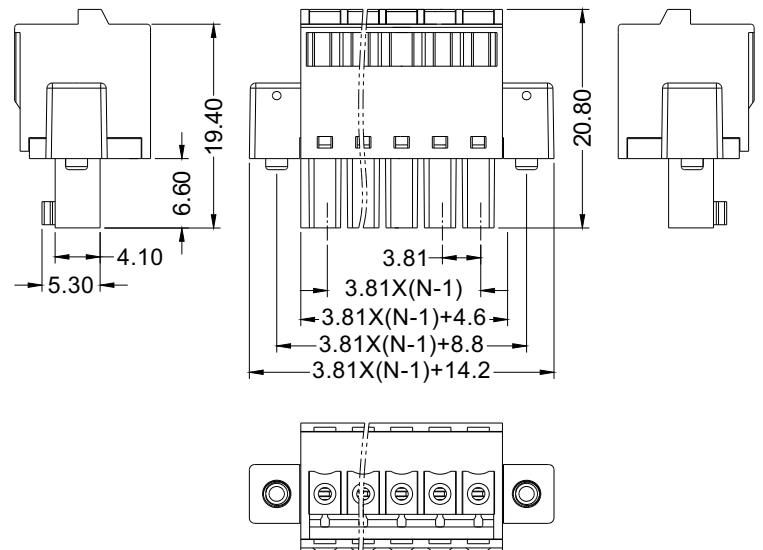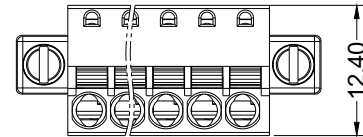




SPECIFICATIONS

Current Rating: 10A Max.
Voltage Rating: 300V
Contact Resistance: 8mΩ Max.
Withstand Voltage: AC2000V
Insulation Resistance: 1000MΩ Min.
Operation Temperature: -40°C to +105°C


Housing Material: PA66+30%GF(UL94V-0)
Contact Material: Brass
Inlay Material: Brass



PM500-1SXXASM1



PM500-1SXXASM2



PM500-1SXXASM3

P M 500 - 1

S

Board-Mounting
S: S/T DIP

XX

Positions
2, 3, 4, 5, 6, 7,
8, 9, 10, 11, 12, 13,
14, 15, 16, 17, 18, 19,
20, 21, 22, 23, 24

A

Color
A: Green


SM

Contact plating area
SM=Matte Tin


1

Options
1=W/O Flange
2=W/ Flange
3=W/O Flange
Open at both ends


PM500-1SXXASM1




13	67.08	60.00			
12	62.08	55.00	24	122.08	115.00
11	57.08	50.00	23	117.08	110.00
10	52.08	45.00	22	112.08	105.00
9	47.08	40.00	21	107.08	100.00
8	42.08	35.00	20	102.08	95.00
7	37.08	30.00	19	97.08	90.00
6	32.08	25.00	18	92.08	85.00
5	27.08	20.00	17	87.08	80.00
4	22.08	15.00	16	82.08	75.00
3	17.08	10.00	15	77.08	70.00
2	12.08	5.00	14	72.08	65.00
Pos	A	B	Pos	A	B




PM500-1SXXASM2

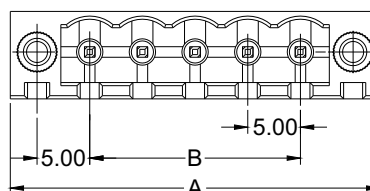


13	75.08	60.00			
12	70.08	55.00	24	130.08	115.00
11	65.08	50.00	23	125.08	110.00
10	60.08	45.00	22	120.08	105.00
9	55.08	40.00	21	115.08	100.00
8	50.08	35.00	20	110.08	95.00
7	45.08	30.00	19	105.08	90.00
6	40.08	25.00	18	100.08	85.00
5	35.08	20.00	17	95.08	80.00
4	30.08	15.00	16	90.08	75.00
3	25.08	10.00	15	85.08	70.00
2	20.08	5.00	14	80.08	65.00
Pos	A	B	Pos	A	B

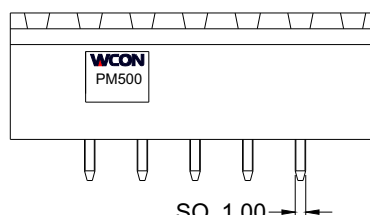

PM500-1SXXASM3



13	65.08	60.00			
12	60.08	55.00	24	120.08	115.00
11	55.08	50.00	23	115.08	110.00
10	50.08	45.00	22	110.08	105.00
9	45.08	40.00	21	105.08	100.00
8	40.08	35.00	20	100.08	95.00
7	35.08	30.00	19	95.08	90.00
6	30.08	25.00	18	90.08	85.00
5	25.08	20.00	17	85.08	80.00
4	20.08	15.00	16	80.08	75.00
3	15.08	10.00	15	75.08	70.00
2	10.08	5.00	14	70.08	65.00
Pos	A	B	Pos	A	B





SPECIFICATIONS

Current Rating: 10A
Voltage Rating: 300V
Contact Resistance: 8milliohm Max
Withstand Voltage: AC2000V
Insulation Resistance: 1000Megohm Min
Operation Temperature: -40°C to +105°C

Housing Material: PA66+30%GF(UL94V-0)
Contact Material: Brass
Inlay Material: Brass



PM500-1RXXASM1



PM500-1RXXASM2



PM500-1RXXASM3

P M 500 - 1

R

Board-Mounting
R:R/A DIP

XX

Positions
2, 3, 4, 5, 6, 7,
8, 9, 10, 11, 12, 13,
14, 15, 16, 17, 18, 19,
20, 21, 22, 23, 24P

A

Color
A: Green


SM

Contact plating area
SM=Matte Tin

1


Options
1=W/O Flange
2=W/ Flange
3=W/O Flange
Open at both ends

PM500-1RXXASM1






13	67.08	60.00			
12	62.08	55.00	24	122.08	115.00
11	57.08	50.00	23	117.08	110.00
10	52.08	45.00	22	112.08	105.00
9	47.08	40.00	21	107.08	100.00
8	42.08	35.00	20	102.08	95.00
7	37.08	30.00	19	97.08	90.00
6	32.08	25.00	18	92.08	85.00
5	27.08	20.00	17	87.08	80.00
4	22.08	15.00	16	82.08	75.00
3	17.08	10.00	15	77.08	70.00
2	12.08	5.00	14	72.08	65.00
Pos	A	B	Pos	A	B


PM500-1RXXASM2

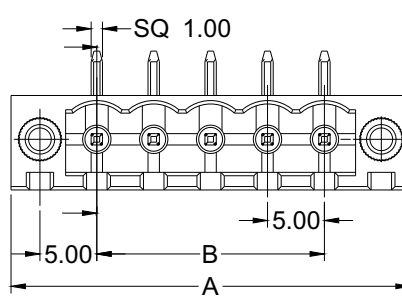


13	75.08	60.00			
12	70.08	55.00	24	130.08	115.00
11	65.08	50.00	23	125.08	110.00
10	60.08	45.00	22	120.08	105.00
9	55.08	40.00	21	115.08	100.00
8	50.08	35.00	20	110.08	95.00
7	45.08	30.00	19	105.08	90.00
6	40.08	25.00	18	100.08	85.00
5	35.08	20.00	17	95.08	80.00
4	30.08	15.00	16	90.08	75.00
3	25.08	10.00	15	85.08	70.00
2	20.08	5.00	14	80.08	65.00
Pos	A	B	Pos	A	B

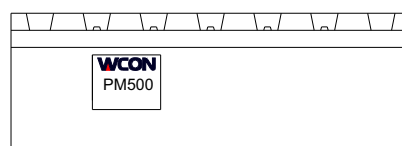

PM500-1RXXASM3



13	65.08	60.00			
12	60.08	55.00	24	120.08	115.00
11	55.08	50.00	23	115.08	110.00
10	50.08	45.00	22	110.08	105.00
9	45.08	40.00	21	105.08	100.00
8	40.08	35.00	20	100.08	95.00
7	35.08	30.00	19	95.08	90.00
6	30.08	25.00	18	90.08	85.00
5	25.08	20.00	17	85.08	80.00
4	20.08	15.00	16	80.08	75.00
3	15.08	10.00	15	75.08	70.00
2	10.08	5.00	14	70.08	65.00
Pos	A	B	Pos	A	B



SPECIFICATIONS

Current Rating: 10A
 Voltage Rating: 300V
 Contact Resistance: 20milliohm Max
 Withstand Voltage: AC2000V
 Insulation Resistance: 1000Megohm Min
 Screw Torque: 4.4 lbf.in
 Wire range: 12-30AWG
 Operation Temperature: -40°C to +105°C

Housing Material: PA66 UL94V-O
 Cover Material: PA66 UL94-V0
 Screw: Steel
 Pin Block: Brass
 Contact: Phosphor Bronze




PF500-AXXASMN1



PF500-AXXASMW1


P	F	500	-	A	XX	A	SM	N	1
					Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	

PF500-AXXASMW1

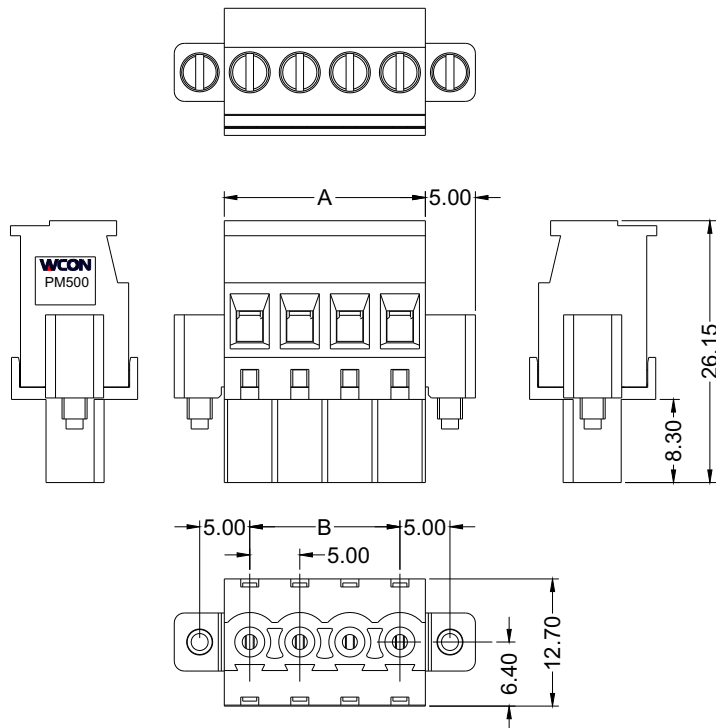

13	65.08	60.00			
12	60.08	55.00	24	120.08	115.00
11	55.08	50.00	23	115.08	110.00
10	50.08	45.00	22	110.08	105.00
9	45.08	40.00	21	105.08	100.00
8	40.08	35.00	20	100.08	95.00
7	35.08	30.00	19	95.08	90.00
6	30.08	25.00	18	90.08	85.00
5	25.08	20.00	17	85.08	80.00
4	20.08	15.00	16	80.08	75.00
3	15.08	10.00	15	75.08	70.00
2	10.08	5.00	14	70.08	65.00
Pos	A	B	Pos	A	B

PF500-AXXASMN1

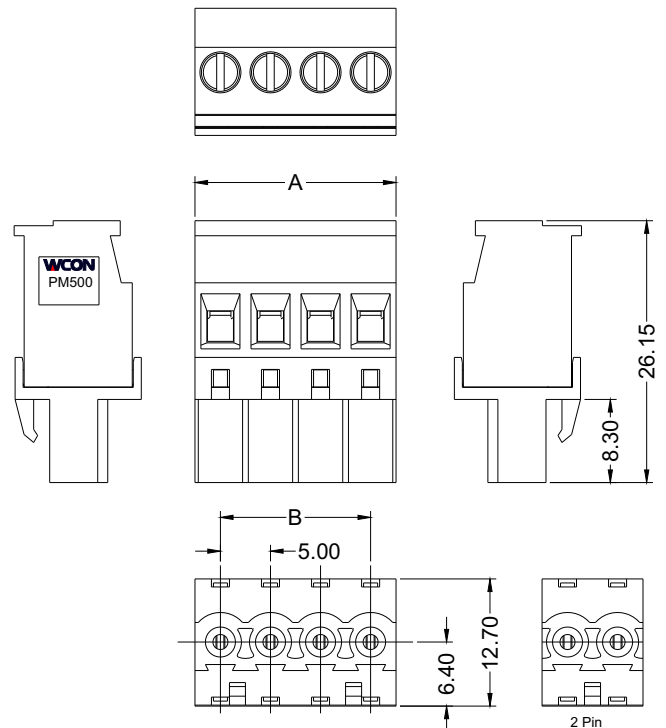

13	65.08	60.00			
12	60.08	55.00	24	120.08	115.00
11	55.08	50.00	23	115.08	110.00
10	50.08	45.00	22	110.08	105.00
9	45.08	40.00	21	105.08	100.00
8	40.08	35.00	20	100.08	95.00
7	35.08	30.00	19	95.08	90.00
6	30.08	25.00	18	90.08	85.00
5	25.08	20.00	17	85.08	80.00
4	20.08	15.00	16	80.08	75.00
3	15.08	10.00	15	75.08	70.00
2	10.08	5.00	14	70.08	65.00
Pos	A	B	Pos	A	B



SPECIFICATIONS

Current Rating:10A
Voltage Rating:300V
Contact Resistance:20milliohm Max
Withstand Voltage:AC2000V
Insulation Resistance:1000Megohm Min
Screw Torque: 4.4 lbf.in
Wire range: 12-30AWG
Operation Temperature:-40°C to +105°C

Housing Material:PA66 UL94V-O
Cover Material:PA66 UL94-V0
Screw:Steel
Pin Block:Brass
Contact:Phosphor Bronze



PF500-BXXASMN1



PF500-BXXASMW1

P F 500 - B XX A SM N 1

Positions
2, 3, 4, 5, 6, 7,
8, 9, 10, 11, 12, 13,
14, 15, 16, 17, 18, 19,
20, 21, 22, 23, 24



Color
A=Green

Contact plating area
SM=Matte Tin

Options
N=W/O Screw
W=W/ Screw

PF500-BXXASMW1

PF500-BXXASMN1

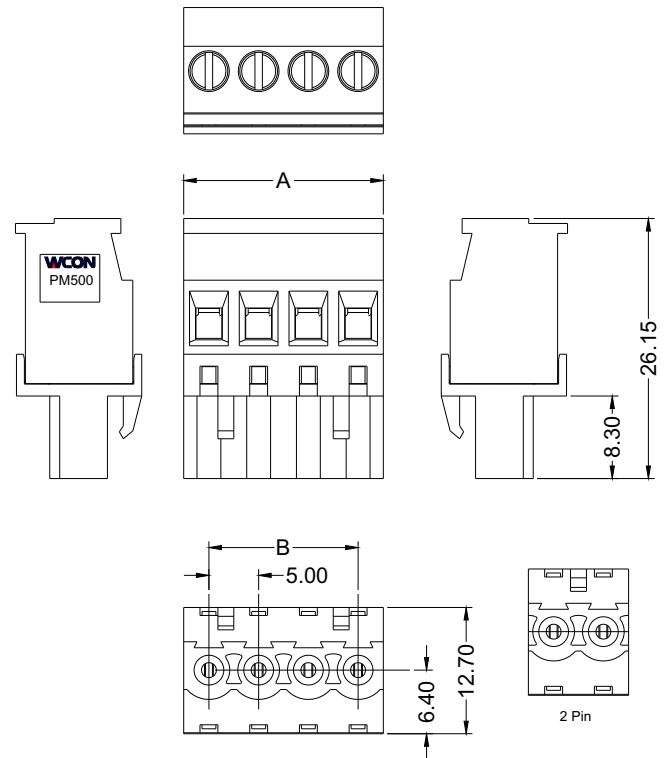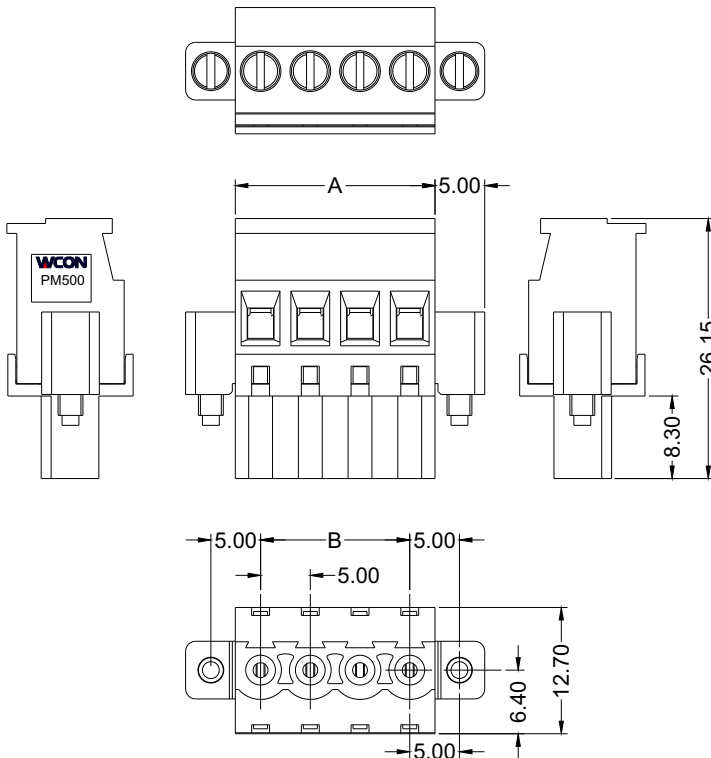

13	65.08	60.00	24	120.08	115.00
12	60.08	55.00	23	115.08	110.00
11	55.08	50.00	22	110.08	105.00
10	50.08	45.00	21	105.08	100.00
9	45.08	40.00	20	100.08	95.00
8	40.08	35.00	19	95.08	90.00
7	35.08	30.00	18	90.08	85.00
6	30.08	25.00	17	85.08	80.00
5	25.08	20.00	16	80.08	75.00
4	20.08	15.00	15	75.08	70.00
3	15.08	10.00	14	70.08	65.00
2	10.08	5.00			
Pos	A	B	Pos	A	B

13	65.08	60.00	24	120.08	115.00
12	60.08	55.00	23	115.08	110.00
11	55.08	50.00	22	110.08	105.00
10	50.08	45.00	21	105.08	100.00
9	45.08	40.00	20	100.08	95.00
8	40.08	35.00	19	95.08	90.00
7	35.08	30.00	18	90.08	85.00
6	30.08	25.00	17	85.08	80.00
5	25.08	20.00	16	80.08	75.00
4	20.08	15.00	15	75.08	70.00
3	15.08	10.00	14	70.08	65.00
2	10.08	5.00			
Pos	A	B	Pos	A	B



SPECIFICATIONS

Current Rating: 10A
Voltage Rating: 300V
Contact Resistance: 20milliohm Max
Withstand Voltage: AC2000V
Insulation Resistance: 1000Megohm Min
Screw Torque: 4.4 lbf.in
Wire range: 12-30AWG
Operation Temperature: -40°C to +105°C

Housing Material: PA66 UL94V-O
Cover Material: PA66 UL94-V0
Screw: Steel
Pin Block: Brass
Contact: Phosphor Bronze



PF500-CXXASMN1



PF500-CXXASMW1

P F 500 - C

XX

A

SM

N

1




Positions
2, 3, 4, 5, 6, 7,
8, 9, 10, 11, 12, 13,
14, 15, 16, 17, 18, 19,
20, 21, 22, 23, 24

Color
A=Green




Contact plating area
SM=Matte Tin

Options
N=W/O Screw
W=W/ Screw

PF500-CXXASMW1



PF500-CXXASMN1

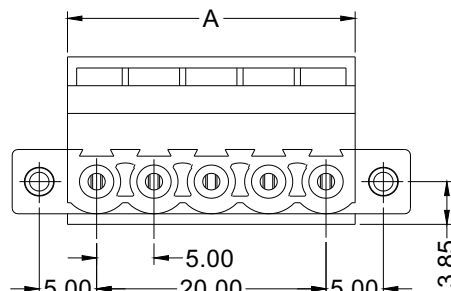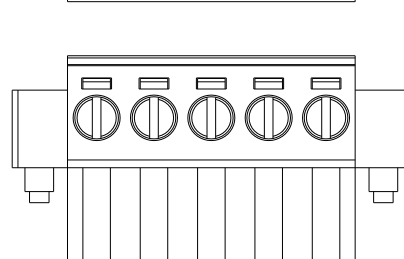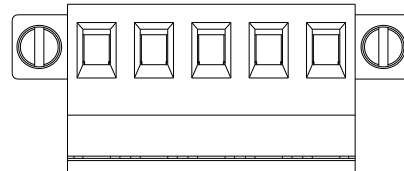

13	65.08	60.00			
12	60.08	55.00	24	120.08	115.00
11	55.08	50.00	23	115.08	110.00
10	50.08	45.00	22	110.08	105.00
9	45.08	40.00	21	105.08	100.00
8	40.08	35.00	20	100.08	95.00
7	35.08	30.00	19	95.08	90.00
6	30.08	25.00	18	90.08	85.00
5	25.08	20.00	17	85.08	80.00
4	20.08	15.00	16	80.08	75.00
3	15.08	10.00	15	75.08	70.00
2	10.08	5.00	14	70.08	65.00
Pos	A	B	Pos	A	B

13P	65.08	60.00			
12P	60.08	55.00	24	120.08	115.00
11P	55.08	50.00	23	115.08	110.00
10P	50.08	45.00	22	110.08	105.00
9	45.08	40.00	21	105.08	100.00
8	40.08	35.00	20	100.08	95.00
7	35.08	30.00	19	95.08	90.00
6	30.08	25.00	18	90.08	85.00
5	25.08	20.00	17	85.08	80.00
4	20.08	15.00	16	80.08	75.00
3	15.08	10.00	15	75.08	70.00
2	10.08	5.00	14	70.08	65.00
Pos	A	B	Pos	A	B



SPECIFICATIONS

Current Rating:18A
Voltage Rating:300V
Contact Resistance:8milliohm Max
Withstand Voltage:AC2000V
Insulation Resistance:1000Megohm Min
Operation Temperature:-40°C to +105°C

Housing Material:PA66+30%GF(UL94V-0)


Contact Material:Brass




PM508-1SXXASM1



PM508-1SXXASM2



PM508-1SXXASM3



PM508-1SXXASM4

P M 508 - 1

S

Board-Mounting
S:S/T DIP

XX

Positions
2, 3, 4, 5, 6, 7,
8, 9, 10, 11, 12, 13,
14, 15, 16, 17, 18, 19,
20, 21, 22, 23, 24

A

Color
A:Green


SM

Contact plating area
SM=Matte Tin

1


Options
1=W/O Flange
2=W/ Flange
3=W/O Flange
Open at both ends
4=W/ Stuck points

PM508-1SXXASM1







13	68.04	60.96			
12	62.96	55.88	24	123.92	116.84
11	57.88	50.80	23	118.84	111.76
10	52.80	45.72	22	113.76	106.68
9	47.72	40.64	21	108.68	101.60
8	42.64	35.56	20	103.60	96.52
7	37.56	30.48	19	98.52	91.44
6	32.48	25.40	18	93.44	86.36
5	27.40	20.32	17	88.36	81.28
4	22.32	15.24	16	83.28	76.20
3	17.24	10.16	15	78.20	71.12
2	12.16	5.08	14	73.12	66.04
Pos	A	B	Pos	A	B


PM508-1SXXASM2

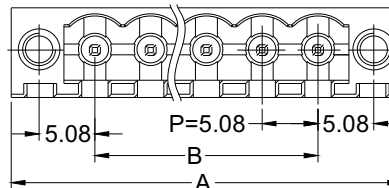

13	76.20	60.96			
12	71.12	55.88	24	132.08	116.84
11	66.04	50.80	23	127.00	111.76
10	60.96	45.72	22	121.92	106.68
9	55.88	40.64	21	116.84	101.60
8	50.80	35.56	20	111.76	96.52
7	45.72	30.48	19	106.68	91.44
6	40.64	25.40	18	101.60	86.36
5	35.56	20.32	17	96.52	81.28
4	30.48	15.24	16	91.44	76.20
3	25.40	10.16	15	86.36	71.12
2	20.32	5.08	14	81.28	66.04
Pos	A	B	Pos	A	B

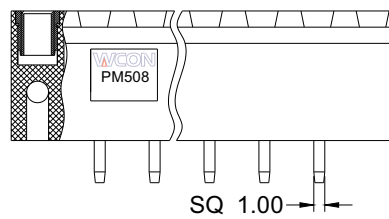


PM508-1SXXASM3







13	66.04	60.96			
12	60.96	55.88	24	121.92	116.84
11	55.88	50.80	23	116.84	111.76
10	50.80	45.72	22	111.76	106.68
9	45.72	40.64	21	106.68	101.60
8	40.64	35.56	20	101.60	96.52
7	35.56	30.48	19	96.52	91.44
6	30.48	25.40	18	91.44	86.36
5	25.40	20.32	17	86.36	81.28
4	20.32	15.24	16	81.28	76.20
3	15.24	10.16	15	76.20	71.12
2	10.16	5.08	14	71.12	66.04
Pos	A	B	Pos	A	B

PM508-1SXXASM4



13	68.04	60.96			
12	62.96	55.88	24	123.92	116.84
11	57.88	50.80	23	118.84	111.76
10	52.80	45.72	22	113.76	106.68
9	47.72	40.64	21	108.68	101.60
8	42.64	35.56	20	103.60	96.52
7	37.56	30.48	19	98.52	91.44
6	32.48	25.40	18	93.44	86.36
5	27.40	20.32	17	88.36	81.28
4	22.32	15.24	16	83.28	76.20
3	17.24	10.16	15	78.20	71.12
2	12.16	5.08	14	73.12	66.04
Pos	A	B	Pos	A	B







SPECIFICATIONS

Current Rating:18A
Voltage Rating:300V
Contact Resistance:8milliohm Max
Withstand Voltage:AC2000V
Insulation Resistance:1000Megohm Min
Operation Temperature:-40°C to +105°C

Housing Material:PA66+30%GF(UL94V-0)



PM508-1RXXASM1



PM508-1RXXASM2



PM508-1RXXASM3

P M 508 - 1

R

XX

A

SM

1

Board-Mounting
R:R/A DIP


Positions
2, 3, 4, 5, 6, 7,
8, 9, 10, 11, 12, 13,
14, 15, 16, 17, 18, 19,
20, 21, 22, 23, 24

Color
A:Green



Contact plating area
SM=Matte Tin

Options
1=W/O Flange
2=W/ Flange
3=W/O Flange
Open at both ends


PM508-1RXXASM1





13	68.04	60.96			
12	62.96	55.88	24	123.92	116.84
11	57.88	50.80	23	118.84	111.76
10	52.80	45.72	22	113.76	106.68
9	47.72	40.64	21	108.68	101.60
8	42.64	35.56	20	103.60	96.52
7	37.56	30.48	19	98.52	91.44
6	32.48	25.40	18	93.44	86.36
5	27.40	20.32	17	88.36	81.28
4	22.32	15.24	16	83.28	76.20
3	17.24	10.16	15	78.20	71.12
2	12.16	5.08	14	73.12	66.04
Pos	A	B	Pos	A	B




PM508-1RXXASM2

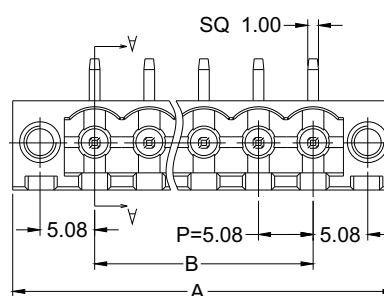



13	76.20	60.96			
12	71.12	55.88	24	132.08	116.84
11	66.04	50.80	23	127.00	111.76
10	60.96	45.72	22	121.92	106.68
9	55.88	40.64	21	116.84	101.60
8	50.80	35.56	20	111.76	96.52
7	45.72	30.48	19	106.68	91.44
6	40.64	25.40	18	101.60	86.36
5	35.56	20.32	17	96.52	81.28
4	30.48	15.24	16	91.44	76.20
3	25.40	10.16	15	86.36	71.12
2	20.32	5.08	14	81.28	66.04
Pos	A	B	Pos	A	B

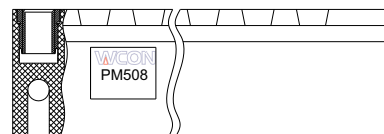

PM508-1RXXASM3



13	66.04	60.96			
12	60.96	55.88	24	121.92	116.84
11	55.88	50.80	23	116.84	111.76
10	50.80	45.72	22	111.76	106.68
9	45.72	40.64	21	106.68	101.60
8	40.64	35.56	20	101.60	96.52
7	35.56	30.48	19	96.52	91.44
6	30.48	25.40	18	91.44	86.36
5	25.40	20.32	17	86.36	81.28
4	20.32	15.24	16	81.28	76.20
3	15.24	10.16	15	76.20	71.12
2	10.16	5.08	14	71.12	66.04
Pos	A	B	Pos	A	B





SPECIFICATIONS

Current Rating: 18A

Voltage Rating: 300V

Contact Resistance: 8milliohm Max

Withstand Voltage: 2000V/AC

Insulation Resistance: 1000Megohm Min

Screw Torque: 4.4 lbf.in

Wire range: 12-30AWG

Operation Temperature: -40°C to +105°C

Housing Material: PA66 UL94V-O




PF508-AXXASMN1



PF508-AXXASMW1


P	F	508	-	A	XX	A	SM	N	1
					Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	

PF508-AXXASMN1

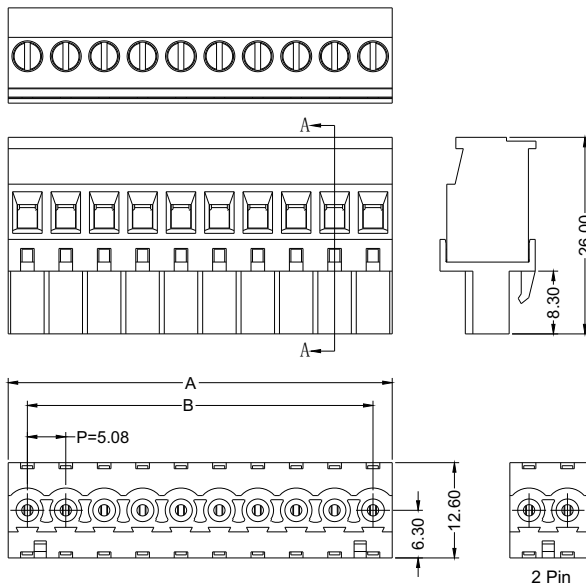

13	66.04	60.96			
12	60.96	55.88	24	121.92	116.84
11	55.88	50.80	23	116.84	111.76
10	50.80	45.72	22	111.76	106.68
9	45.72	40.64	21	106.68	101.60
8	40.64	35.56	20	101.60	96.52
7	35.56	30.48	19	96.52	91.44
6	30.48	25.40	18	91.44	86.36
5	25.40	20.32	17	86.36	81.28
4	20.32	15.24	16	81.28	76.20
3	15.24	10.16	15	76.20	71.12
2	10.16	5.08	14	71.12	66.04
Pos	A	B	Pos	A	B

PF508-AXXASMW1

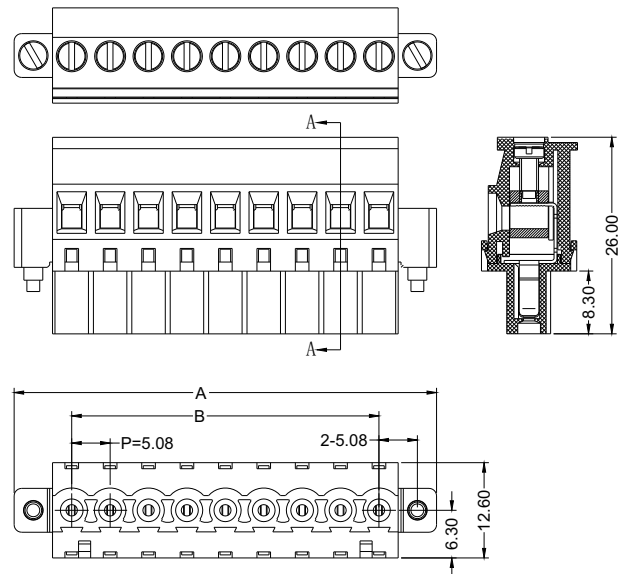

13	76.20	60.96			
12	71.12	55.88	24	132.08	116.84
11	66.04	50.80	23	127.00	111.76
10	60.96	45.72	22	121.92	106.68
9	55.88	40.64	21	116.84	101.60
8	50.80	35.56	20	111.76	96.52
7	45.72	30.48	19	106.68	91.44
6	40.64	25.40	18	101.60	86.36
5	35.56	20.32	17	96.52	81.28
4	30.48	15.24	16	91.44	76.20
3	25.40	10.16	15	86.36	71.12
2	20.32	5.08	14	81.28	66.04
Pos	A	B	Pos	A	B



SPECIFICATIONS

Current Rating:18A

Voltage Rating:300V

Contact Resistance:8milliohm Max

Withstand Voltage:AC2000V

Insulation Resistance:1000Megohm Min

Screw Torque: 4.4 lbf.in

Wire range: 12-30AWG

Operation Temperature:-40°C to +105°C

Housing Material:PA66 UL94V-O




PF508-BXXASMN1



PF508-BXXASMW1


P	F	508	-	B	XX	A	SM	N	1
					Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	

PF508-BXXASMN1

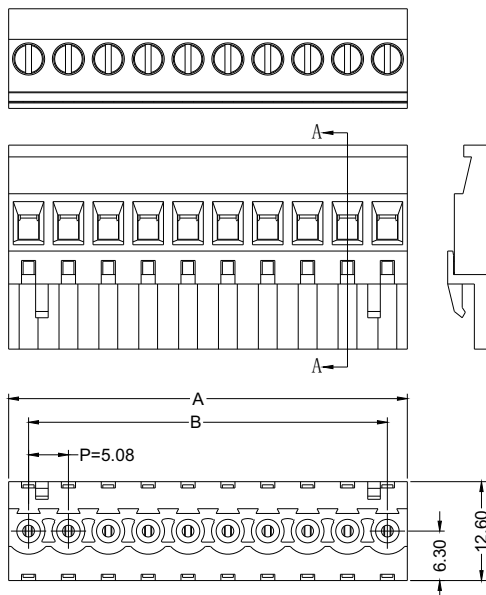

13	66.04	60.96			
12	60.96	55.88	24	121.92	116.84
11	55.88	50.80	23	116.84	111.76
10	50.80	45.72	22	111.76	106.68
9	45.72	40.64	21	106.68	101.60
8	40.64	35.56	20	101.60	96.52
7	35.56	30.48	19	96.52	91.44
6	30.48	25.40	18	91.44	86.36
5	25.40	20.32	17	86.36	81.28
4	20.32	15.24	16	81.28	76.20
3	15.24	10.16	15	76.20	71.12
2	10.16	5.08	14	71.12	66.04
Pos	A	B	Pos	A	B

PF508-BXXASMW1

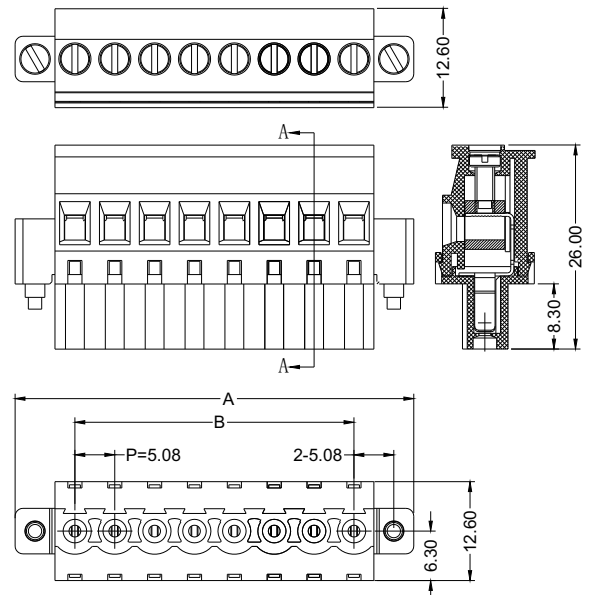

13	76.20	60.96			
12	71.12	55.88	24	132.08	116.84
11	66.04	50.80	23	127.00	111.76
10	60.96	45.72	22	121.92	106.68
9	55.88	40.64	21	116.84	101.60
8	50.80	35.56	20	111.76	96.52
7	45.72	30.48	19	106.68	91.44
6	40.64	25.40	18	101.60	86.36
5	35.56	20.32	17	96.52	81.28
4	30.48	15.24	16	91.44	76.20
3	25.40	10.16	15	86.36	71.12
2	20.32	5.08	14	81.28	66.04
Pos	A	B	Pos	A	B



SPECIFICATIONS

Current Rating:18A

Voltage Rating:300V

Contact Resistance:8milliohm Max

Withstand Voltage:AC2000V

Insulation Resistance:1000Megohm Min

Screw Torque: 4.4 lbf.in

Wire range: 12-30AWG

Operation Temperature:-40°C to +105°C

Housing Material:PA66 UL94V-O





PF508-CXXASMN1





PF508-CXXASMW1

P	F	508	-	C	XX	A	SM	N	1
					Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	

PF508-CXXASMN1

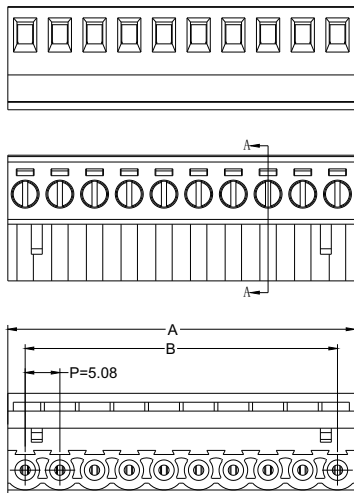

PF508-CXXASMW1

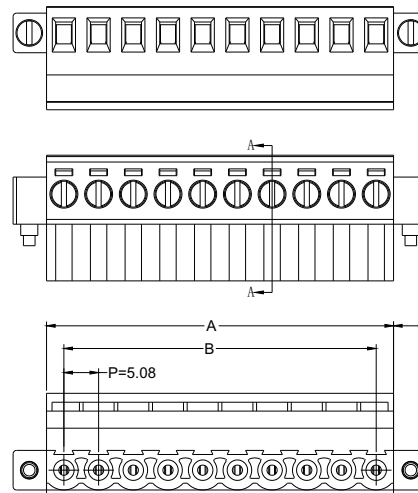

13	66.04	60.96			
12	60.96	55.88	24	121.92	116.84
11	55.88	50.80	23	116.84	111.76
10	50.80	45.72	22	111.76	106.68
9	45.72	40.64	21	106.68	101.60
8	40.64	35.56	20	101.60	96.52
7	35.56	30.48	19	96.52	91.44
6	30.48	25.40	18	91.44	86.36
5	25.40	20.32	17	86.36	81.28
4	20.32	15.24	16	81.28	76.20
3	15.24	10.16	15	76.20	71.12
2	10.16	5.08	14	71.12	66.04
Pos	A	B	Pos	A	B


13	66.04	60.96			
12	60.96	55.88	24	121.92	116.84
11	55.88	50.80	23	116.84	111.76
10	50.80	45.72	22	111.76	106.68
9	45.72	40.64	21	106.68	101.60
8	40.64	35.56	20	101.60	96.52
7	35.56	30.48	19	96.52	91.44
6	30.48	25.40	18	91.44	86.36
5	25.40	20.32	17	86.36	81.28
4	20.32	15.24	16	81.28	76.20
3	15.24	10.16	15	76.20	71.12
2	10.16	5.08	14	71.12	66.04
Pos	A	B	Pos	A	B




SPECIFICATIONS

Rated Current: 10.0 AMP
Contact Resistance: 20 mΩ Max
Withstand Voltage: 2000 V AC/DC
Insulation Resistance: 1000 MΩ min
Operation Temperature: -40°C to +105°C
Wire Range: 26~12 AWG
Wire Strip Length: 7 mm
No. of Positions: 2~24

Terminal Material: Phosphor Bronze
Terminal Plating:
Matte Tin Plated Over Nickel
Spring Blade Material: Stainless Steel
Up Cover Material:
(High Temp.) Thermoplastic, UL94 V-0
Below Cover Material:
(High Temp.) Thermoplastic, UL94 V-0
Push Pole Material:
(High Temp.) Thermoplastic, UL94 V-0




PF508S-1FXXASMN1N




PF508S-1FXXASMW1N

P	F	508	S	-	1	F	<u>XX</u>	<u>A</u>	<u>SM</u>	<u>N</u>	1	N
							Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw		

PF508S-1FXXASMN1N

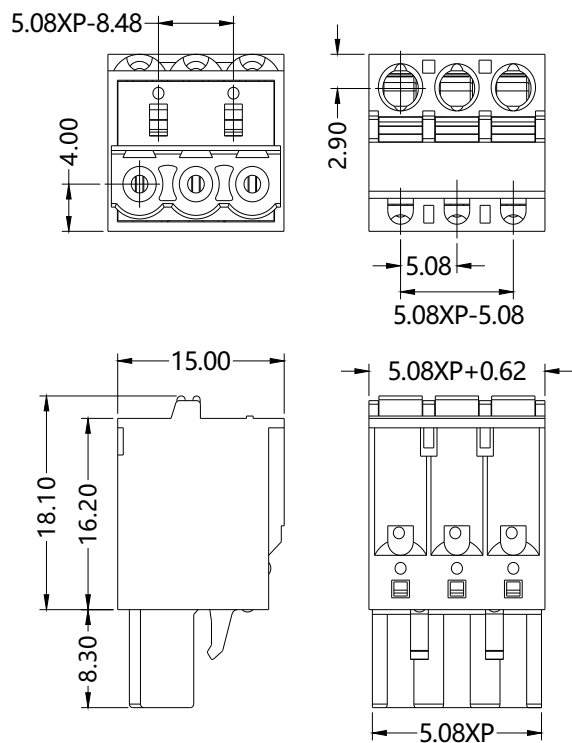

PF508S-1FXXASMW1N

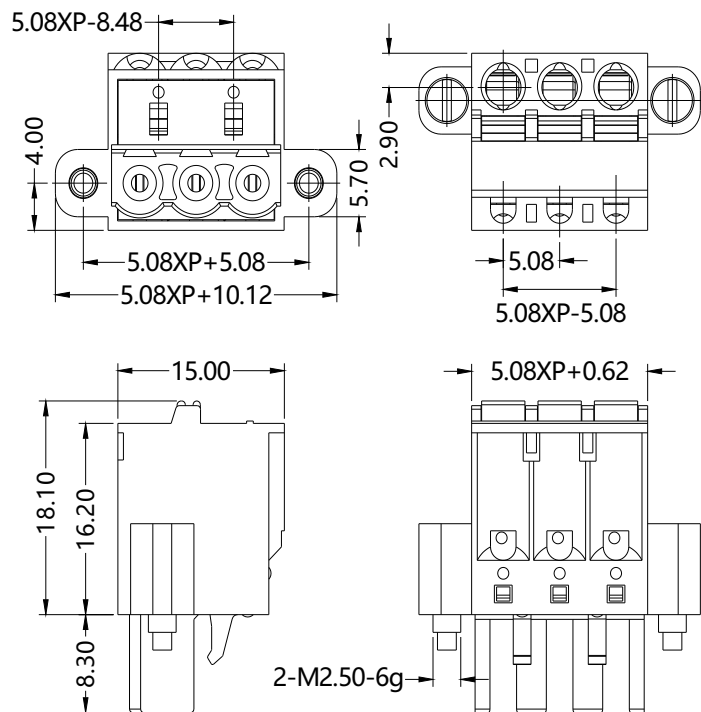



SPECIFICATIONS

Rated Current:10.0 AMP

Contact Resistance:20 mΩ Max

Withstand Voltage:2000 V AC/DC

Insulation Resistance:1000 MΩ min

Operation Temperature:-40°C to +105°C

Wire Range:26~12 AWG

Wire Strip Length: 7 mm

No. of Positions:2~24

Terminal Material:Phosphor Bronze

Terminal Plating:

Matte Tin Plated Over Nickel


Spring Blade Material:Stainless Steel

Up Cover Material:


(High Temp.)Thermoplastic,UL94 V-0

Below Cover Material:


(High Temp.)Thermoplastic,UL94 V-0



PF508S-2FXXASMW1




PF508S-2FXXASMW1




PF508S-2FXXASMS1N




P	F	508	S	-	2	F	XX	A	SM	N	1	N
							Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw S=W/ Earbuckles		




PF508S-2FXXASMW1



PF508S-2FXXASMW1

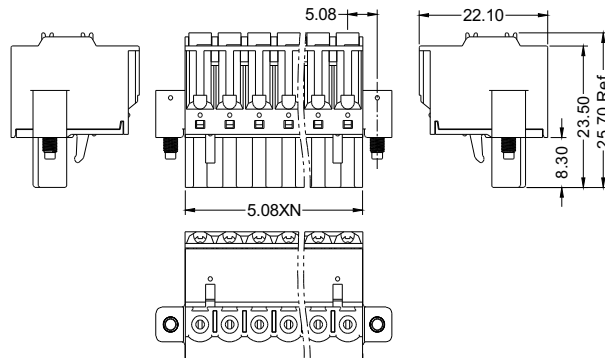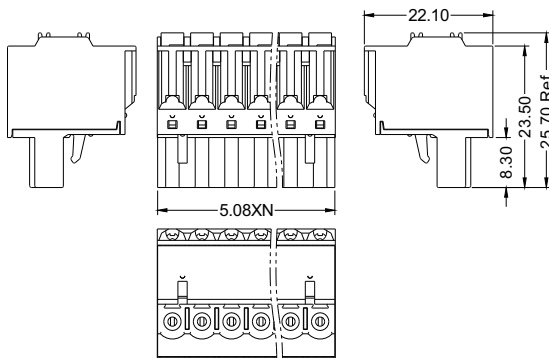

PF508S-2FXXASMS1N

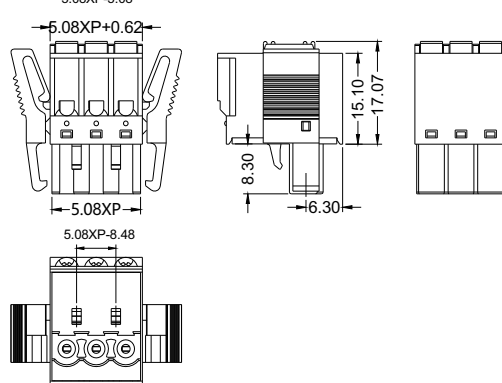



SPECIFICATIONS

Rated Current: 18.0 AMP

Contact Resistance: 8.0 milliohm Max

Withstand Voltage: 2000 V AC/DC

Insulation Resistance: 1000 Megohm min

Operation Temperature: -40°C to +105°C

Housing Material: PA66+30%GF(UL94V-0)

Contact Material: Brass



PM750-1SXXASM1






PM750-1SXXASM2






PM750-1SXXASM3

P	M	750	-	1	S	XX	A	SM	1
					Board-Mounting S:S/T DIP	Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20	Color A: Green	Contact plating area SM=Matte Tin	Options 1=W/O Flange 2=W/ Flange 3=W/O Flange Open at both ends




PM750-1SXXASM1

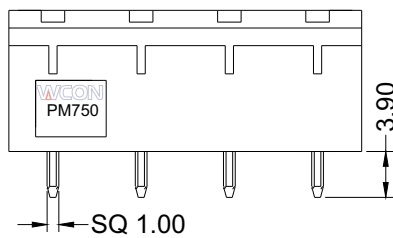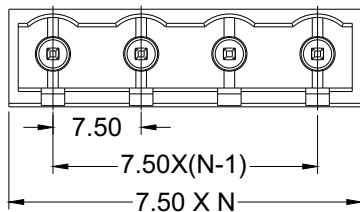

PM750-1SXXASM2

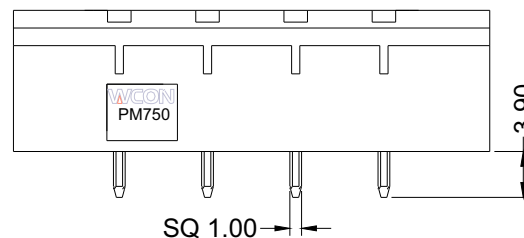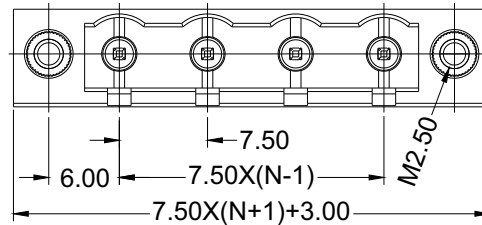

PM750-1SXXASM3

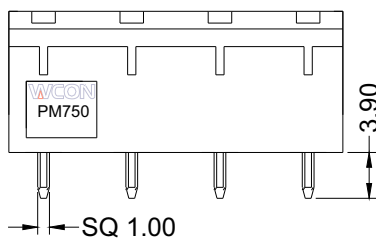



SPECIFICATIONS

Rated Current: 18.0 AMP

Contact Resistance: 8.0 milliohm Max


Withstand Voltage: 2000 V AC/DC

Insulation Resistance: 1000 Megohm min


Operation Temperature: -40°C to +105°C

Housing Material: PA66+30%GF(UL94V-0)


Contact Material: Brass



PM750-1RXXASM1




PM750-1RXXASM2




PM750-1RXXASM3

P	M	750	-	1	R	XX	A	SM	1
					Board-Mounting R:R/A DIP	Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20	Color A:Green	Contact plating area SM=Matte Tin	Options 1=W/O Flange 2=W/ Flange 3=W/O Flange Open at both ends


PM750-1RXXASM1

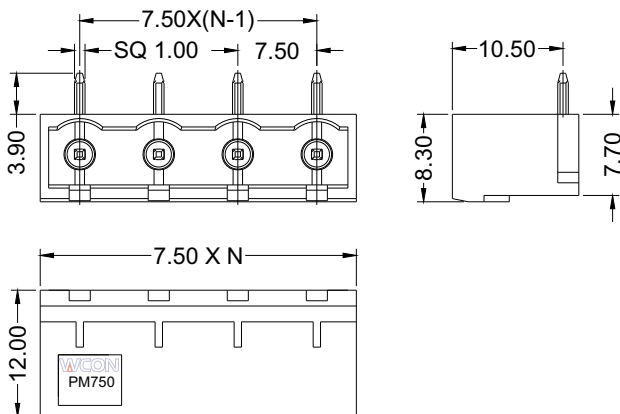

PM750-1RXXASM2

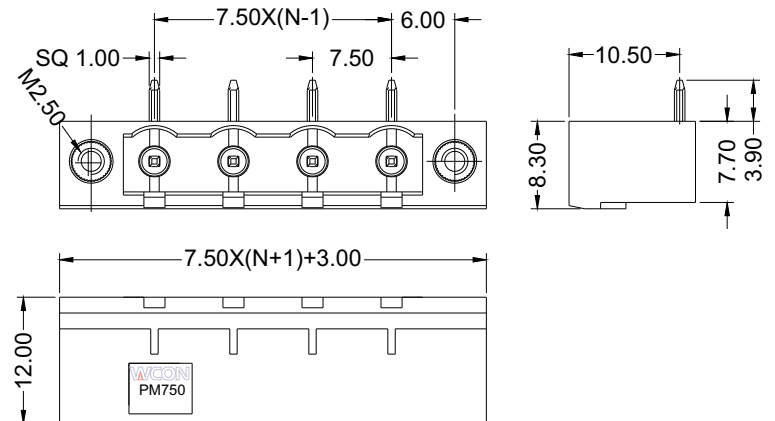

PM750-1RXXASM3

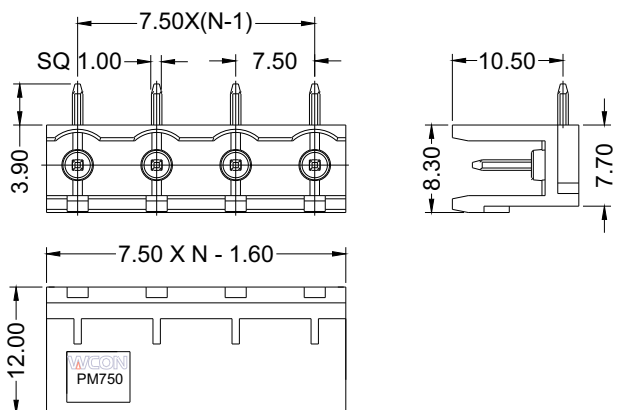

SPECIFICATIONS

Rated Current: 18.0 AMP
 Contact Resistance: 8 mΩ Max
 Withstand Voltage: 2000 V AC/DC
 Insulation Resistance: 1000 MΩ min
 Operation Temperature: -40°C to +105°C
 Wire Range: 30~12 AWG
 Wire Strip Length: 7 mm
 No. of Positions: 2~20
 Screw Counter Torsion Force: 4.4 lbf.in Min.

Terminal Material: Phosphor Bronze
 Terminal Plating: Matte Tin Plated Over Nickel
 Pin Block Material: Brass
 Pin Block Plating: Nickel Plated Over All
 Screw Material: Steel
 Screw Plating: Nickel Plated Over All
 Up Cover Material: PA66 UL94 V-0
 Below Cover Material: PA66 UL94 V-0




PF750-AXXASMN1




PF750-AXXASMW1

P	F	750	-	A	XX	A	SM	N	1
					Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	

PF750-AXXASMN1

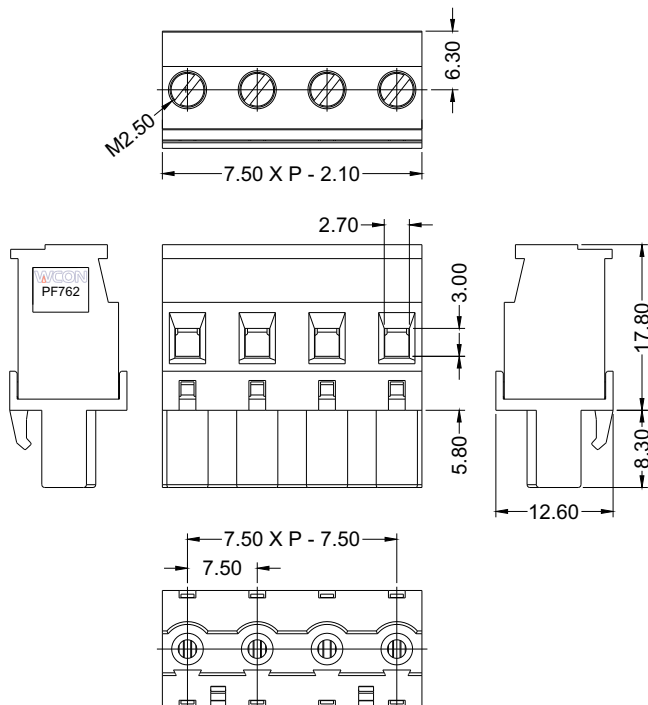

PF750-AXXASMW1

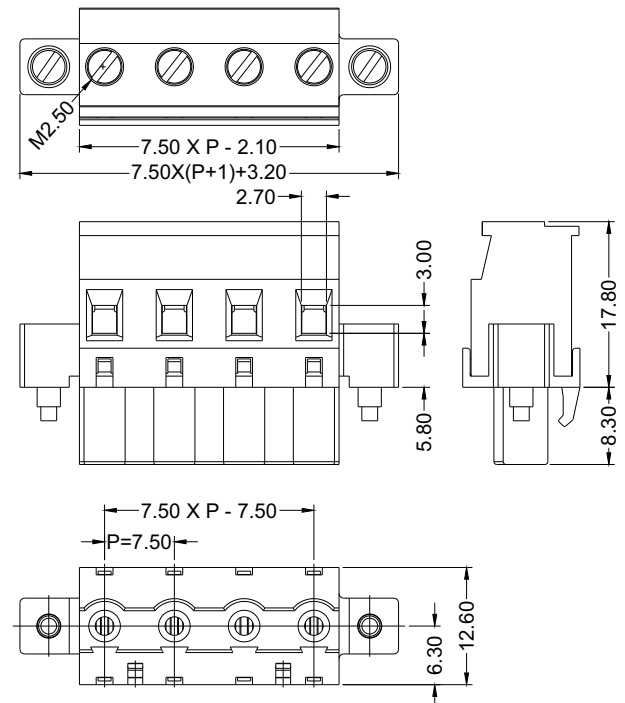



SPECIFICATIONS

Rated Current: 18.0 AMP

Contact Resistance: 8 mΩ Max

Withstand Voltage: 2000 V AC/DC

Insulation Resistance: 1000 MΩ min

Operation Temperature: -40°C to +105°C

Wire Range: 30~12 AWG

Wire Strip Length: 7 mm

No. of Positions: 2~20

Screw Counter Torsion Force: 4.4 lbf.in Min.

Terminal Material: Phosphor Bronze

Terminal Plating: Matte Tin Plated Over Nickel

Pin Block Material: Brass

Pin Block Plating: Nickel Plated Over All

Screw Material: Steel

Screw Plating: Nickel Plated Over All

Up Cover Material: PA66 UL94 V-0

Below Cover Material: PA66 UL94 V-0



PF750-BXXASMN1



PF750-BXXASMW1

P F 750 - B

XX

A

SM

N

1




Positions
2, 3, 4, 5, 6,
7, 8, 9, 10, 11,
12, 13, 14, 15, 16,
17, 18, 19, 20

Color
A=Green




Contact plating area
SM=Matte Tin

Options
N=W/O Screw
W=W/ Screw

PF750-BXXASMN1

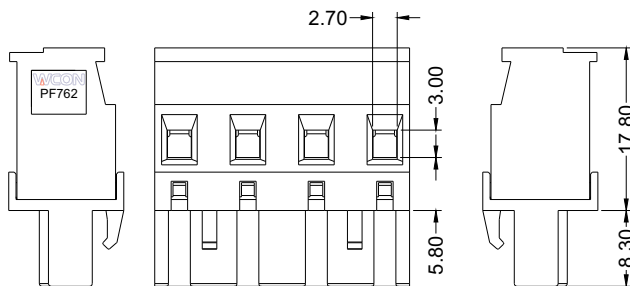


PF750-BXXASMW1

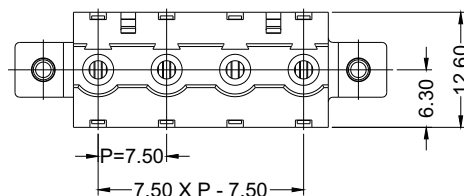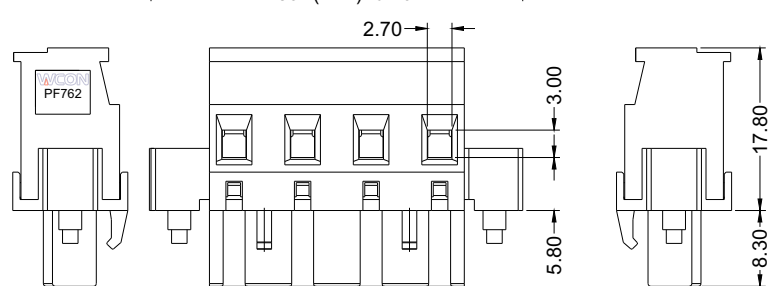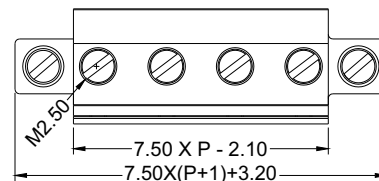


SPECIFICATIONS

Rated Current: 18.0 AMP
 Contact Resistance: 8 mΩ Max
 Withstand Voltage: 2000 V AC/DC
 Insulation Resistance: 1000 MΩ min
 Operation Temperature: -40°C to +105°C
 Wire Range: 30~12 AWG
 Wire Strip Length: 7 mm
 No. of Positions: 2~20
 Screw Counter Torsion Force: 4.4 lbf.in Min.

Terminal Material: Phosphor Bronze
 Terminal Plating: Matte Tin Plated Over Nickel
 Pin Block Material: Brass
 Pin Block Plating: Nickel Plated Over All
 Screw Material: Steel
 Screw Plating: Nickel Plated Over All
 Up Cover Material: PA66 UL94 V-0




PF750-CXXASMN1




PF750-CXXASMW1

P	F	750	-	C	XX	A	SM	N	1
					Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	

PF750-CXXASMN1

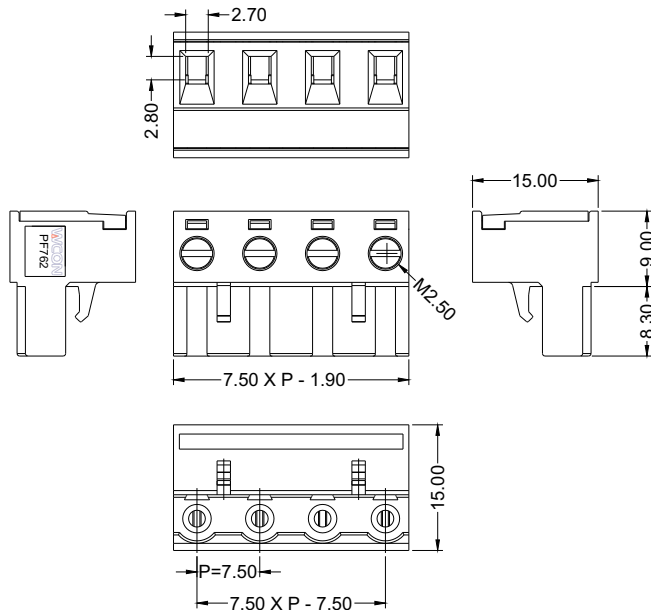

PF750-CXXASMW1

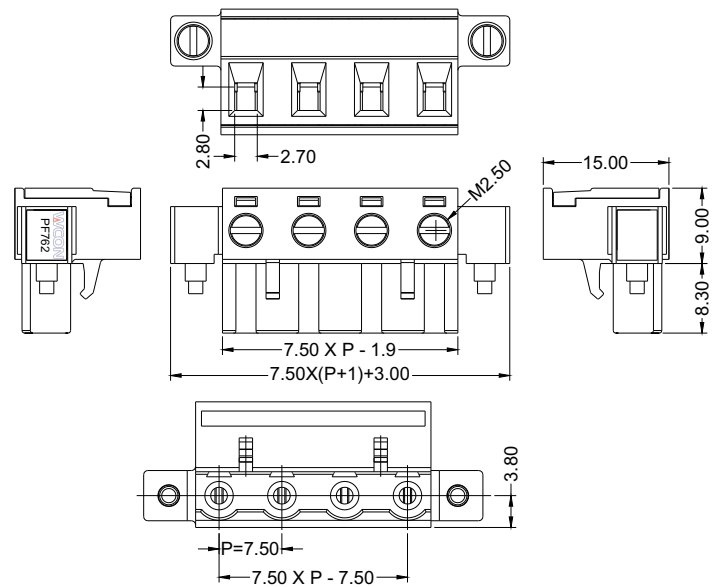



SPECIFICATIONS

Rated Current: 18.0 AMP

Contact Resistance: 8.0 milliohm Max

Withstand Voltage: 2000 V AC/DC

Insulation Resistance: 1000 Megohm min

Operation Temperature: -40°C to +105°C

Housing Material: PA66+30%GF(UL94V-0)

Contact Material: Brass

Terminal Plating:

Matte Tin Plated Over Nickel



PM762-1SXXASM1




PM762-1SXXASM2




PM762-1SXXASM3

P	M	762	-	1	S	XX	A	SM	1
					Board-Mounting S:S/T DIP	Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20	Color A: Green	Contact plating area SM=Matte Tin	Options 1=W/O Flange 2=W/ Flange 3=W/O Flange Open at both ends


PM762-1SXXASM1

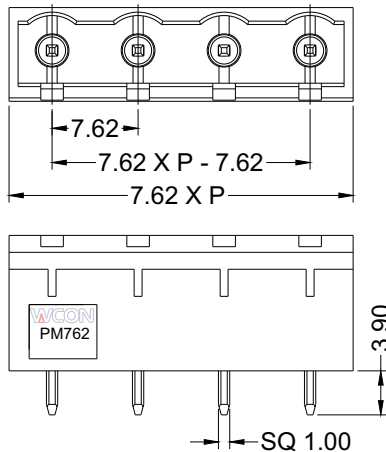

PM762-1SXXASM2

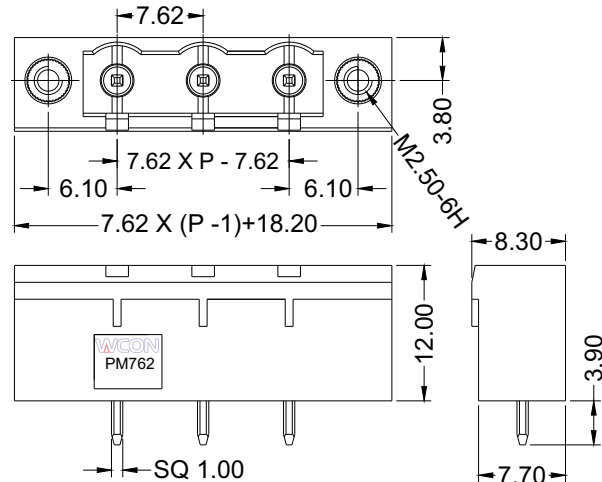

PM762-1SXXASM3

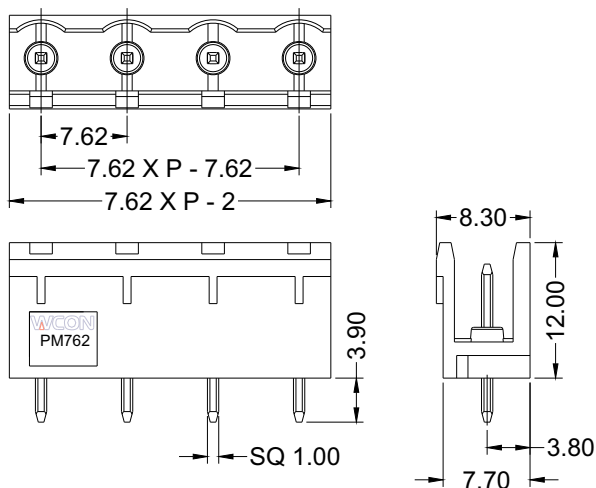



SPECIFICATIONS

Rated Current: 18.0 AMP

Contact Resistance: 8.0 milliohm Max

Withstand Voltage: 2000 V AC/DC

Insulation Resistance: 1000 Megohm min


Operation Temperature: -40°C to +105°C

Housing Material: PA66+30%GF(UL94V-0)


Contact Material: Brass

Terminal Plating:

Matte Tin Plated Over Nickel



PM762-1RXXASM1



PM762-1RXXASM2



PM762-1RXXASM3

P M 762 - 1

R

Board-Mounting
R:R/A DIP

XX

Positions
2, 3, 4, 5, 6,
7, 8, 9, 10, 11,
12, 13, 14, 15, 16,
17, 18, 19, 20

A

Color
A: Green


SM

Contact plating area
SM=Matte Tin


1

Options
1=W/O Flange
2=W/ Flange
3=W/O Flange
Open at both ends


PM762-1RXXASM1

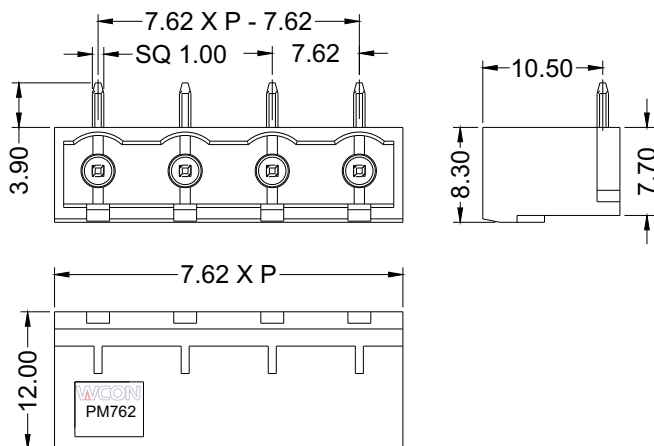

PM762-1RXXASM2

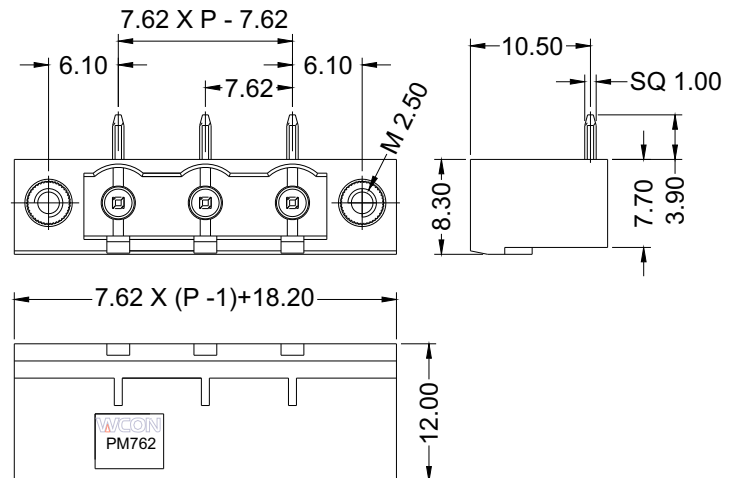

PM762-1RXXASM3

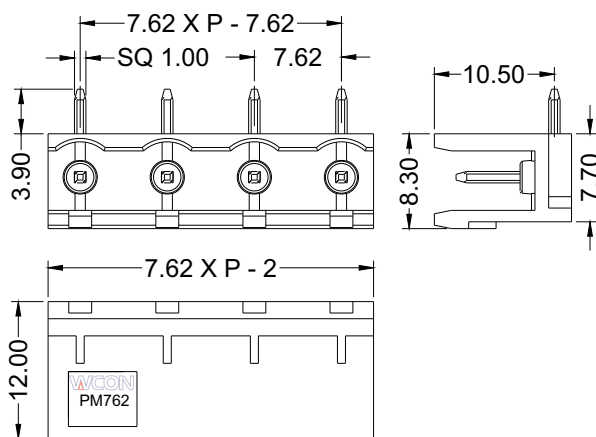



SPECIFICATIONS

Rated Current: 18.0 AMP

Contact Resistance: 8 mΩ Max

Withstand Voltage: 2000 V AC/DC

Insulation Resistance: 1000 MΩ min

Operation Temperature: -40°C to +105°C

Wire Range: 30~12 AWG

Wire Strip Length: 7 mm

No. of Positions: 2~20

Screw Counter Torsion Force: 4.4 lbf.in Min.

Terminal Material: Phosphor Bronze

Terminal Plating: Matte Tin Plated Over Nickel

Pin Block Material: Brass

Pin Block Plating: Nickel Plated Over All

Screw Material: Steel

Screw Plating: Nickel Plated Over All

Up Cover Material: PA66 UL94 V-0

Below Cover Material: PA66 UL94 V-0






PF762-AXXASMN1






PF762-AXXASMW1

P	F	762	-	A	<u>XX</u>	<u>A</u>	<u>SM</u>	<u>N</u>	1
					Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	

PF762-AXXASMN1

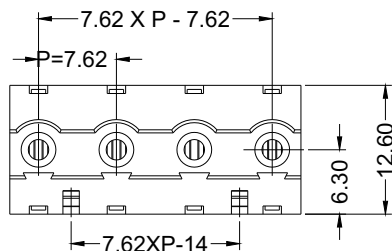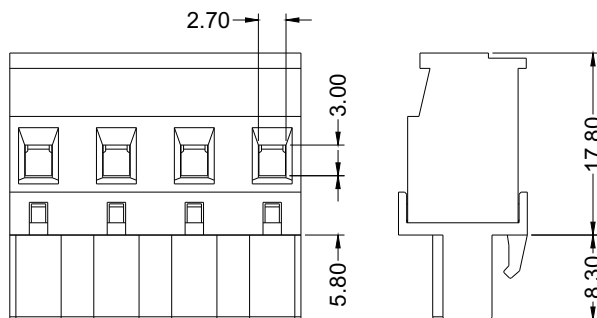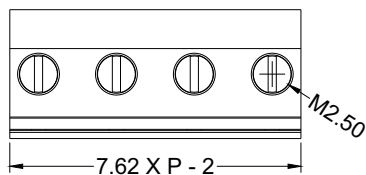

PF762-AXXASMW1

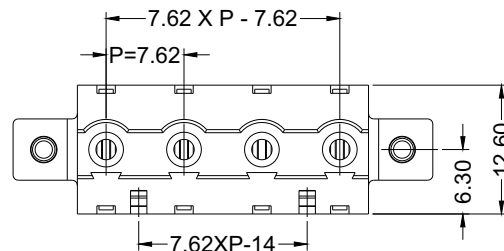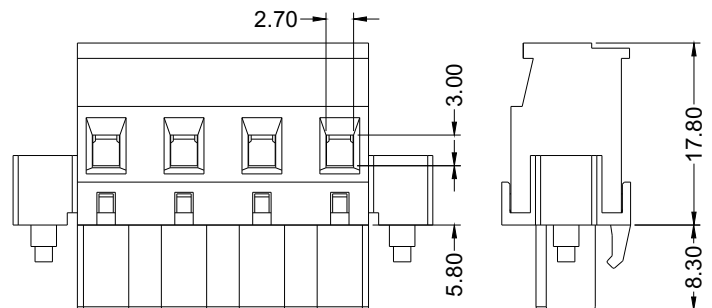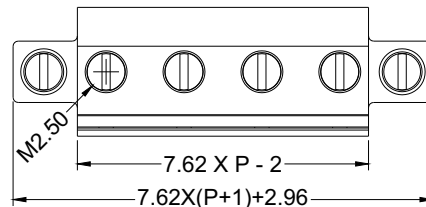

SPECIFICATIONS

Rated Current: 18.0 AMP
 Contact Resistance: 8 mΩ Max
 Withstand Voltage: 2000 V AC/DC
 Insulation Resistance: 1000 MΩ min
 Operation Temperature: -40°C to +105°C
 Wire Range: 30~12 AWG
 Wire Strip Length: 7 mm
 No. of Positions: 2~20
 Screw Counter Torsion Force: 4.4 lbf.in Min.

Terminal Material: Phosphor Bronze
 Terminal Plating: Matte Tin Plated Over Nickel
 Pin Block Material: Brass
 Pin Block Plating: Nickel Plated Over All
 Screw Material: Steel
 Screw Plating: Nickel Plated Over All
 Up Cover Material: PA66 UL94 V-0
 Below Cover Material: PA66 UL94 V-0






PF762-BXXASMN1






PF762-BXXASMW1

P	F	762	-	B	<u>XX</u>	<u>A</u>	<u>SM</u>	<u>N</u>	1
					Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	

PF762-BXXASMN1

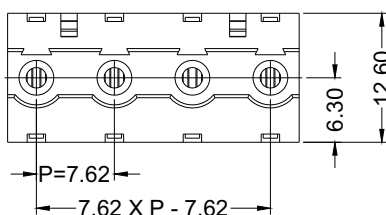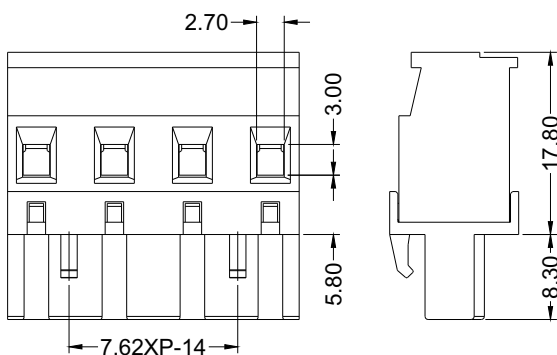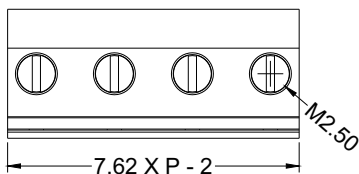

PF762-BXXASMW1

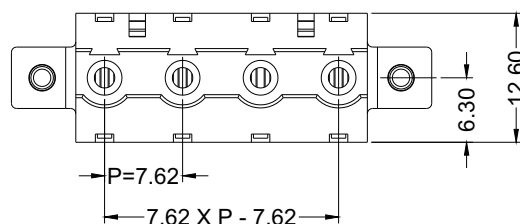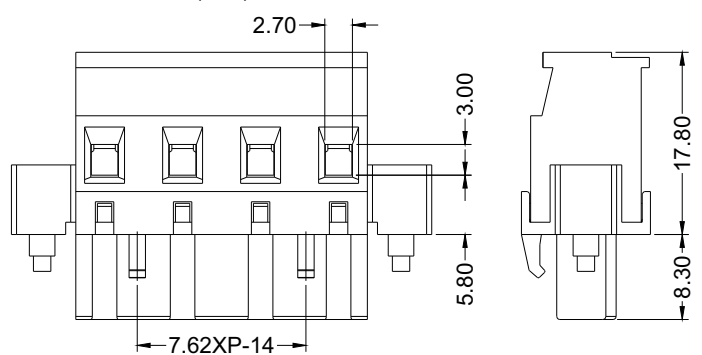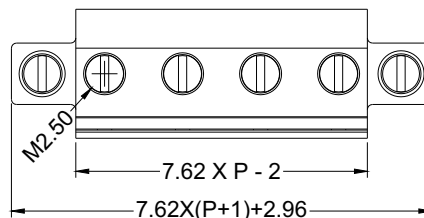



SPECIFICATIONS

Rated Current: 18.0 AMP

Contact Resistance: 8 mΩ Max

Withstand Voltage: 2000 V AC/DC

Insulation Resistance: 1000 MΩ min

Operation Temperature: -40°C to +105°C

Wire Range: 30~12 AWG

Wire Strip Length: 7 mm

No. of Positions: 2~20

Screw Counter Torsion Force: 4.4 lbf.in Min.

Terminal Material: Phosphor Bronze

Terminal Plating: Matte Tin Plated Over Nickel

Pin Block Material: Brass


Pin Block Plating: Nickel Plated Over All

Screw Material: Steel


Screw Plating: Nickel Plated Over All

Up Cover Material: PA66 UL94 V-0

Below Cover Material: PA66 UL94 V-0




PF762-CXXASMN1

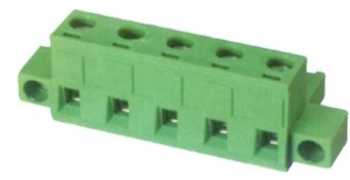

PF762-CXXASMW1

P	F	762	-	C	XX	A	SM	N	1
					Positions 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20	Color A=Green	Contact plating area SM=Matte Tin	Options N=W/O Screw W=W/ Screw	

PF762-CXXASMN1

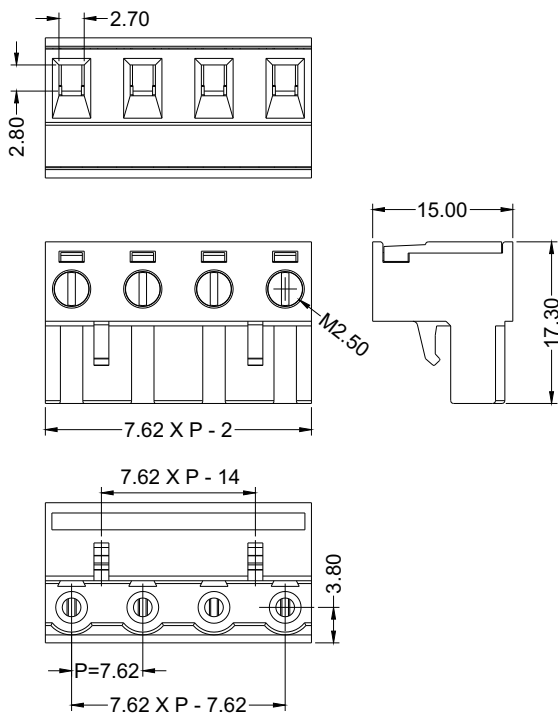

PF762-CXXASMW1

